

## Industrial Cleaning Paper Blue and White

- Rag is suitable for all uses
- High absorption power and dirt absorption
- Minimum consumption
- Water proof and solvent resistant

### Application Area

- Ideal for parts, glass and other surfaces and drainage, absorbing technical spilled liquid and water, cleaning hands

### Characteristics

- Optimal perforation, environmentally friendly, high value recycling material

### Technical Data

Material	Paper
----------	-------



12

INTERNAL/Approved (2019-03-22 22:32:50)

Title	Blade L x W	Number Of blades	Number of layers	Container	Length total (mm)	Color	PU Amount	Article No.
-------	-------------	------------------	------------------	-----------	-------------------	-------	-----------	-------------

## Cleaning cloth

### Perforated polishing cloth

- Highly useful for sensitive areas
  - Solvent-resistant
  - Soft
  - Low linting
- Economical in consumption
  - High absorption capacity
  - Liquid absorption up to 10 times its own weight
- Tear resistant
- Multiple use possible

#### Application Area

- Cleaning and maintenance of delicate surfaces
- Optimally suitable for varnishing, painting and polishing works

#### Technical Data

Material Natural viscose fibre



Title	Blade L x W	Number Of blades	Number of layers	Diameter External	Container	Length total (mm)	Color	Weight	PU Roll	Article No.
Perforated Polishing Cloth	38 x 30 cm	500 PC	1	300 mm	Roll	190 m	White	50 g/m <sup>2</sup>	1	145194
Polishing Rag Perforated	38 x 30 cm	500 PC	1	320 mm	Roll	190 m	White	75 g/m <sup>2</sup>	1	100245

AGR: 08.510

## Pulp cloth dispenser SET

- High absorbency and wet strength
- Resistant against solvents
- Reusable
- Easy handling, protects the wiping roll against dust, dirt and moisture

### Characteristics

- 200 cloths á 24 x 38 cm

### Technical Data

Material	Cellulose 100%
Color	blue / white
Number of layers	1



Title	Blade L x W	Length total (mm)	Container	Number Of blades	PU Amount	Article No.
PAPER TISSUE DISPENSER SET	38 x 24 cm	76 m	Box	200 PC	1	185711
PAPER TISSUE REFILL PACK	38 x 24 cm	76 m	Roll	400 PC	1/2	185712

AGR: 08.522

INTERNAL/Approved (2019-03-22 22:33:03)

## Cleaning cloth

### Anti-Static Cloths

- Suitable for all paints
- Multiple uses possible
- Silicone free
- Lint-free



#### Application Area

- Used for cleaning of body or body parts before painting

Title	Color	PU Piece	Article No.
Anti-Static Cloths	Yellow	1	859101

AGR: 08.540

### Wiping rags - tricot cloths

- Lint free
  - Suitable for almost every surface
- Highly absorbing
  - Thick cotton quality absorbs liquids and oil
  - Protects hands from heat and dirt



#### Application Area

- Cleaning soiled surfaces of vehicles, tools, workplaces, machinery

#### Hints

- Free of hooks, loops, zippers, etc.
- Not suitable for car polish
- Product made from polo shirts and other cotton textiles

#### Technical Data

Material	Cotton
----------	--------

Title	Color	Weight	PU Sack	Article No.
Wiping rags - tricot cloths	multicolor	10 kg	1/5/30	200117
Wiping rags - tricot cloths	multicolor	5 kg	1	249784

AGR: 08.511

## Special Fleece Cleaning Cloth

- Extremely tearproof, also in wet conditions
- Binds liquids up to 9 times the unladen weight
- Lint-free through special fabrics

### Application Area



- Cleaning of sensitive surfaces

### Characteristics

- Multiple use, very soft, silicone-free

### Technical Data

Material Fleece

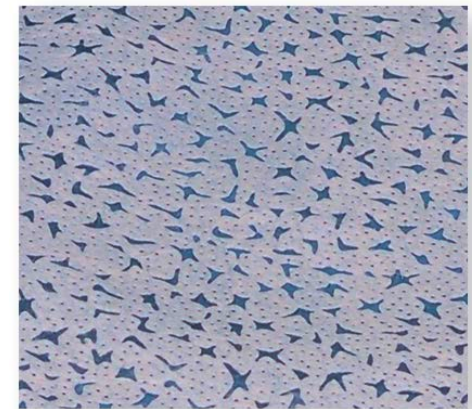

12

Title	Blade L x W	Number Of blades	Container	Length total (mm)	Color	Weight	PU Amount	Article No.
Special Fleece Cleaning Cloth	38 x 30 cm	25 PC	Pack	9.5 m	Blue	80 g/m <sup>2</sup>	1	092460
Special Fleece Cleaning Cloth	38 x 30 cm	500 PC	Roll	190 m	Blue	80 g/m <sup>2</sup>	1	139860

AGR: 08.510

## Cleaning cloth

### Tork industrial heavy-duty wiping paper

- Highly absorbent
  - ▶ 3 ply embossed
  - ▶ Strong texture
- Leaves no residues on a surface
  - ▶ Silicone-free
- Multi-purpose
  - ▶ Ideal for removing oil, grease, lubricants and dirt
  - ▶ Protects hands from heat and dirt
- Economic
  - ▶ High-capacity roll lasts longer and saves time on refilling
  - ▶ QuickDry™: strongest, most absorbent paper, for more efficient drying with less waste

#### Application Area

- For professional use in workshops

#### Processing Information

- Remove the core roll when using in the Uni-Box

#### Hints

- Matching dispenser system: W1 – Wipers wall/floor/standard system

#### Technical Data

Material Paper

Title	Blade L x W	Number Of blades	Number of layers	Diameter External	Container	Length total (mm)	Color	PU Roll	Article No.
Tork 400 Blue Combi Cleaning	34 x 23.5 cm	350 PC	3	262 mm	Roll	119 m	light blue	1/4	042353
Tork industrial heavy-duty wiping paper	34 x 37 cm	750 PC	3	390 mm	Roll	255 m	light blue	1/2	042354

AGR: 08.500





## Wipe 430 Blue

- Comfortable usage
  - 2 Ply embossed
  - Ideal for mopping up liquids and hand drying
- Leaves no residues on a surface
  - Silicone-free
- Economic
  - High-capacity roll lasts longer and saves time on refilling
  - QuickDry™: strongest, most absorbent paper, for more efficient drying with less waste

### Application Area

- Tork Advanced, 2 layers
- For the wiping off of small amounts of greases or oils
- Cleaning of mirrors and windows

### Characteristics

- High productivity, low operating costs
- 2 layers, absorbent and tear-proof

### Hints

- Matching dispenser system: W1/W2/W3 Wiper pack system

### Technical Data

Material Paper



INTERNAL/Approved (2019-03-22 22:33:29)

Title	Blade L x W	Number Of blades	Number of layers	Diameter External	Container	Length total (mm)	Color	PU Piece	Article No.
Tork heavy-duty wiping paper	34 x 23.5 cm	500 PC	2	262 mm	Roll	170 m	Blue	1/2	051225

AGR: 08.500

### Accessories Available

	PU Amount	Article No.
Internal Unwinding Tork Dispenser 207001	1	881454

## Cleaning cloth

### Wipe 420 White Combi

- Comfortable usage
  - ▶ 2 Ply embossed with print
  - ▶ Ideal for mopping up liquids and hand drying
  - ▶ Multipurpose - handles most wiping tasks
- Economical and efficient
  - ▶ QuickDry™: strongest, most absorbent paper, for more efficient drying with less waste
- Food contact approved

#### Application Area

- Tork Advanced: For smooth surfaces, machinery and for drying hands

#### Characteristics

- Absorbent, tear-proof, 2 layers, perforated

#### Hints

- Matching dispenser system:  
for wiping cloth 420 Combi 130041: W1/W2  
for wiping cloth 420 large roll 130045: W1

#### Technical Data

Material Paper

Title	Blade L x W	Number Of blades	Number of layers	Diameter External	Container	Length total (mm)	Color	PU Roll	Article No.
Tork wiping paper plus	34 x 23.5 cm	750 PC	2	262 mm	Roll	255 m	White	1/2	042355
Tork wiping paper plus	34 x 24 cm	1500 PC	2	-	Roll	510 m	White	1/2/4	042356

AGR: 08.500





## Cleaning Cloth Roll

### Application Area

- Tork Premium- Top of the line, superior quality
- Ideal as a polishing rag in a car repair shop and as a rag for pickling in wood processing

### Characteristics

- Very soft fleece sheet, can take up the sixfold amount of paint of its own weight

### Hints

- Matching dispenser system: W1

### Technical Data

Material Fleece



Title	Blade L x W	Number Of blades	Number of layers	Container	Length total (mm)	Color	PU Roll	Article No.
E-TORK SOFT LRG.ROLL 550104	38 x 42 cm	1000 PC	1	Roll	380 m	White	1	159408

AGR: 08.510

## Cleaning cloth

### Tork Cleaning Cloth

#### Technical Data

Material Waste paper



Title	Blade L x W	Number Of blades	Number of layers	Container	Length total (mm)	Color	PU Piece	Article No.
TORK SERVOIL GREEN 129243	38 x 24 cm	1500 PC	2	Roll	570 m	Green	1/2	161323

AGR: 08.500

### Wipe 415 Mini 1-Ply

#### Characteristics

- Tork Advanced
- Bright white cleaning roll out of pure cellulose
- Heavy quality, food-safe, lint-free, wet tear-proof

#### Hints

- Matching dispenser system: M1

#### Technical Data

Material Cellulose 100%



Title	Blade L x W	Number of layers	Container	Length total (mm)	Color	PU Roll	Article No.
Wipe 415 Mini 1-Ply	21.5 x 21.5 cm	1	Roll	120 m	Yellow	1/11	816104

AGR: 08.500

## Wipe 415

### Characteristics

- Tork Advanced
- Bright white cleaning roll out of pure cellulose
- Absorbent
- Wet-strength
- Economical in use

### Hints

- Matching dispenser system: M2

### Technical Data

Material Cellulose 100%



Title	Blade L x W	Number of layers	Container	Length total (mm)	Color	PU Roll	Article No.
Wipe 415	21.5 x 21.5 cm	1	Roll	275 m	Yellow	1/6	816098

AGR: 08.500

## Cleaning cloth

### Wipe 420 Mini 2-Ply

- Comfortable usage
  - 2 ply embossed
  - User friendly and operable with only one hand
  - Versatile solution for professional environments, in which both the hands and surfaces must be wiped off
- Economic
  - A soft, strong and at the same time absorbent paper
  - Provides efficient drying with lower amount of waste



#### Application Area

- Multipurpose wiping paper for surfaces and hands

#### Characteristics

- Tork Advanced
- High-quality cellulose roll
- Tear-proof cleaning cloth
- Absorbent towel



#### Hints

- Matching dispenser system: M1

#### Technical Data

Material Paper



Title	Blade L x W	Number Of blades	Number of layers	Diameter External	Container	Length total (mm)	Color	PU Roll	Article No.
Tork wiping paper plus Cfeed mini- M1	35 x 21.5 cm	214 PC	2	140 mm	Roll	74.9 m	White	1/11	109389

AGR: 08.522

Accessories Available

PU  
Amount

Article No.

INTERNAL/Approved (2019-03-22 22:33:55)

## Toilet Paper Mini Jumbo

- Comfortable usage
  - Premium quality provides enormous comfort
  - Decorative 2 ply bay-leaf embossing in blue
  - Pleasant smooth and soft touch
- Economical
  - Long lasting
  - High capacity reduces maintenance of dispenser
- Enhances the appearance of the washroom

### Application Area

- Suitable for washrooms with medium to high visitor frequency

### Characteristics

- Tork Premium
- Toilet paper out of particularly soft, perforated cellulose

### Hints

- Matching dispenser system: T2

### Technical Data

Material	Paper
Color	White
Container	Roll
Roll diameter (empty)	59 mm



Title	Blade length	Blade width	Roll Length	Number Of blades	Number of layers	Diameter External	PU Roll	Article No.
T2 - Tork toilet paper mini jumbo	20 cm	9.7 cm	170 m	850 PC	2	188 mm	1	816203

AGR: 08.520

## Cleaning cloth

### Toilet Paper 60 Rolls

- Comfortable usage
  - Advanced quality provides high comfort
  - Decorative 2 ply embossing
  - Voluminous feeling
- Economical
  - Good price-performance ratio

#### Application Area

- Suitable for washrooms with low visitor frequency

#### Characteristics

- Tork Advanced, out of high-quality recycled fibers, perforated and embossed, soft, hygienic and kind to skin

#### Hints

- Matching dispenser system: T4

#### Technical Data

Material	Paper
Color	White
Container	Roll
Roll diameter (empty)	40 mm



Title	Blade length	Blade width	Roll Length	Number Of blades	Number of layers	Diameter External	PU Sack	Article No.
T4 - Tork toilet paper small rolls	12 cm	9.4 cm	30 m	250 PC	2	103 mm	1	157608

AGR: 08.520



## Toiletpaper Basic

- Comfortable usage
  - 2 ply toilet paper for daily usage
  - Good absorbent paper for maximum comfort
- Economical
  - Good price-performance ratio
- Certified with the Nordic Swan eco-label
- Certified with the EU Ecolabel



12

### Application Area

- For professional use in less frequently used washrooms

### Characteristics

- Sheet size: 116 x 98mm
- Amount of sheets: 250
- Amount of layers: 2
- Color: natural white

### Scope Of Delivery

- 64 rolls

### Technical Data

Color	grey/ white
Container	Roll

Title	Blade length	Blade width	Number Of blades	Number of layers	PU Sack	Article No.
TOILETPAPER BASIC 64 ROLLS	11.6 cm	9.8 cm	250 PC	2	1	219041

AGR: 08.520

## Cleaning cloth

### Folded Towels 192 Pieces

- Economic
  - Good price-performance ratio
  - Towel meets basic requirements
- Ecologic
  - Made from recycled material

#### Application Area

- Handtowels for basic requirements

#### Characteristics

- Tork Universal, white creping quality

#### Hints

- Matching dispenser system: H3 Classic

#### Technical Data

Material	Recycled fibres
Color	Light grey
Number of layers	1



Title	Blade L x W	Container	Number Of blades	PU Bundle	Article No.
FOLDED TOWEL	25 x 31 cm	Bag	192 PC	1/24	855165

AGR: 08.522

## Folded Towels 250 Pieces

- Comfortable usage
  - ▶ 2 ply decor pattern embossed
  - ▶ One-handed dispensing
- Economical and highly effective
  - ▶ Reduces consumption and helps to improve hygiene
  - ▶ Tork Advanced quality for when cost and performance are equally important
  - ▶ Many towels per bundle: serves more and requires less frequent refilling

### Application Area

- For professional use in washrooms

### Characteristics

- Tork Advanced, unique sheet embossing

### Hints

- Matching dispenser system: H3 Classic

### Technical Data

Material	Recycled fibres
Color	Green
Number of layers	2



Title	Blade L x W	Container	Number Of blades	PU Bundle	Article No.
Tork green singlefold hand towel advanced	23 x 24.8 cm	Bag	250 PC	1/15	082833

AGR: 08.522

INTERNAL/Approved (2019-03-22 22:34:19)

## Cleaning cloth

### Cleaning Cloth

#### Characteristics

- Tork Premium, the ideal replacement for textile wiping rags, wet tear-resistant and resistant against solvents

#### Hints

- Matching dispenser system: W4 Top Pak

#### Scope Of Delivery

- 1 box = 5 bags à 140 sheets

#### Technical Data

Material	Fleece
Color	Light grey
Number of layers	1



Title	Blade L x W	Container	Number Of blades	PU Carton	Article No.
TORK MULTI CARTON/5 BAG AGR: 08.510	35.5 x 42.8 cm	Cardboard	600 PC	1	155174

## Spezialtuch Cleaning 530137

- Absorbent, tear-proof and lint-free
- No development of static electricity

### Application Area

- For professional usage in workshops

### Characteristics

- Tork Premium
- Cleaning and degreasing cloth
- Consists out of a cloth composite material, which cleans surfaces even more reliably

### Processing Information

- Designed for single-hand dispensing

### Hints

- Matching dispenser system: W1/W2/W3 Wiper Pack

### Technical Data

Material Fleece

Title	Blade L x W	Number Of blades	Number of layers	Diameter External	Container	Length total (mm)	Color	PU Piece	Article No.
Spezialtuch Cleaning 530137	38 x 32 cm	280 PC	1	250 mm	Roll	106 m	White	1	249526

AGR: 08.510

### Accessories Available

	PU Amount	Article No.
Internal Unwinding Tork Dispenser 207001	1	881454



## Cleaning cloth

### Micro Stretch Soft

- High cleaning and suction power
- Can be used for dry and wet cleaning, with or without cleaning agents
- Lint, dust free and skin-friendly
- For smooth plastic, leather and wood surfaces
- Particularly suitable for sensitive areas because the product is very soft and smooth
- Can be washed over 100 times

#### Application Area

- Cleaning and maintenance of surfaces






## Anti-Fog Cloth

Title	Length x width	PU Piece	Article No.
Demisting Cloth	300 x 350 mm	1	187437

AGR: 04.790

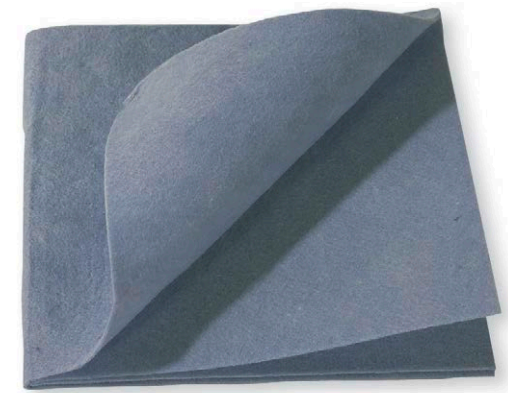

12


## Car Care Set 4-Part

### Scope Of Delivery

- Insect sponge, car wash sponge, leather sponge, PU car cleaning cloth Perfo

Title	PU Assortment	Article No.
CAR CARE SET 4-PART	1	114114

AGR: 08.540

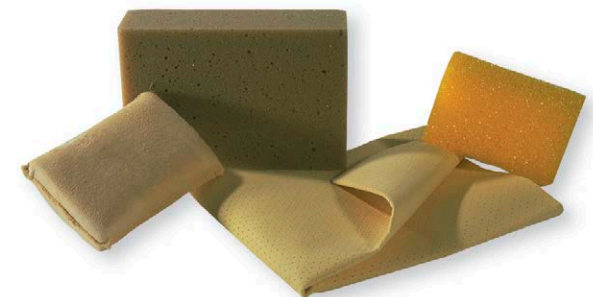


## Cleaning cloth

### Car Cleaning Cloth PU PERFO

#### Technical Data

Material Polyurethane (PU)

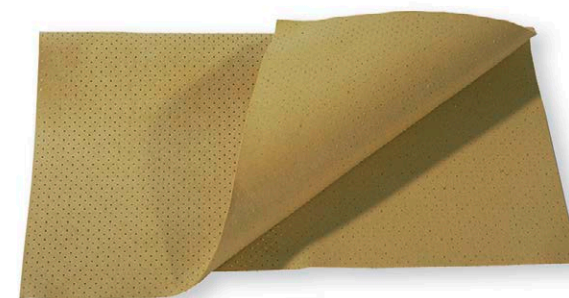

12

Title	Length x width	Color	PU Piece	Article No.
CAR CLEAN CL PU PERFO 47X39 CM	47 x 39 cm	Yellow	1	114097

AGR: 08.540

### Car leather

#### Technical Data

Material Leather



Title	Length x width	Color	PU Piece	Article No.
CHAMOIS LEATH DUROS 55X37 CM	55 x 37 cm	Yellow	1	150703

AGR: 08.540

INTERNAL/Approved (2019-03-22 22:34:44)

## Car Sponge Half Round



12

Title	Length	Width	Height	Color	PU Piece	Article No.
CAR SPONGE HALF RND 170X80X50	17 cm	8 cm	5 cm	Yellow	1	104536

AGR: 08.540

## Car Sponge Universal



Title	Length	Width	Height	Color	PU Piece	Article No.
CAR SPONGE UNIVERSAL 18X12 CM	18 cm	12 cm	6 cm	Blue	1	870908

AGR: 08.540

INTERNAL/Approved (2019-03-22 22:34:51)

## Cleaning cloth

### Microfibre washing glove Rasta

- Can be used for dry and wet cleaning
  - ▶ The microfibres guarantee a very thorough cleaning or polishing result
- 2 in 1 washing glove with 2 different surface types
  - ▶ The front is perfect for cleaning windows and cars
  - ▶ The back is perfect for dusting and wiping
- Machine washable at 60°C



#### Application Area

- Car cleaning: perfect for dusting surfaces and cleaning windows
- For cleaning garage equipment

#### Hints

- Avoid dryer machine for maximum lifetime of the textiles

#### Technical Data

Material	70% polyester - 30% polyamide
Machine washable at	60°

Title	Length x width	Color	Content	Weight	PU Piece	Article No.
Washing glove Rasta	27 x 23 cm	Green	1 PC	199 g	1	366779

AGR: 08.540

### Nanex glove

- Quick use, saves time
  - ▶ Contains a new revolutionary rubber polymer that replaces clay products
  - ▶ Unlike traditional clay products, the Nanex products do not stick
- Can be reused up to 50 times
- Lasts 4 times longer than clay products



#### Application Area

- For car cleaning: the Nanex products are to be used in combination with a cleaning lubricant product

#### Processing Information

- Never use Nanex products on a dirty car or on a hot surface
- Do not put Nanex products in a washing machine or dryer
- After use, rinse with water and let dry

- Spray a professional lubricant on the surface and rub in straight lines with the Nanex glove
- First use the Nanex glove for 60 seconds on glass to remove the protective coat and to soften the polymer
- Work on small areas of about 30 x 30 cm
- Use the fine quality for particularly delicate surfaces (scratch or dirt-sensitive lacquer, black lacquer, ...) and the standard quality for all other surfaces
- If your glove accidentally falls on the ground, just rinse the dirt with water and then continue working

### Hints

- Avoid dryer machine for maximum lifetime of the textiles

### Technical Data

Material Rubber polymer + Microfibre

Title	Length x width	Color	Content	Weight	PU Piece	Article No.
Nanex glove blue fine	21.5 x 14.5 cm	Blue	1 PC	73 g	1	366784
Nanex glove yellow medium	21.5 x 14.5 cm	Yellow	1 PC	73 g	1	366783

AGR: 08.540

## Microfibre dusting glove Elegant

- Can be used for dry and wet cleaning
  - The microfibres guarantee a very thorough cleaning or polishing result
- Machine washable at 60°

### Application Area

- Car cleaning: perfect for dusting surfaces and garage equipment

### Hints

- Avoid dryer machine for maximum lifetime of the textiles

### Technical Data

Material 70% polyester - 30% polyamide  
 Machine washable at 60°

Title	Length x width	Color	Content	Weight	PU Piece	Article No.
Microfibre dusting glove Elegant	22 x 14 cm	Blue	5 PC	34 g	5	366780

AGR: 08.540



INTERNAL/Approved (2019-03-22 22:35:02)



**Cleaning cloth**

**Insect Sponge**



12

Title	Length	Width	Height	Color	PU Piece	Article No.
INSECT SPONGE 11X7X4CM	11 cm	7 cm	4 cm	Yellow	1	870915

AGR: 08.540

**Tile sponge**



Title	Length	Width	Height	PU Piece	Article No.
FLAGSTONE SPONGE	18 cm	11 cm	6 cm	1	039064

AGR: 08.540

INTERNAL/Approved (2019-03-22 22:35:11)



## Power Sponge Premium

- Handles tough jobs and aggressive cleaning products
  - Allows industries and craftsmen to rub clean and absorb the most stubborn dirt
- Doesn't scratch or damage the surface
- Can be washed in the washing machine
  - Made of a compact and rot-proof foam



12

### Application Area


- Cleaning of all surfaces
- For all difficult cleaning tasks

Title	Length	Width	Height	Color	Material	PU Package	Article No.
Power Sponge Premium	13.6 cm	9 cm	2.6 cm	black	Polyester 100%	1	358532

AGR: 08.540

## Magic sponge Sublimo

- Light and flexible foam
  - Made of melamine
- Impressive cleaning properties
  - Does not need a lot of expensive chemicals
  - Works already with just a little bit of water
  - Releases its active ingredient gradually during use
- Allows to erase stains on the most diverse surfaces by microabrasion

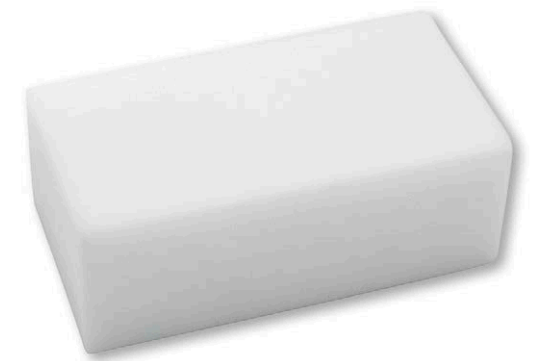

### Application Area

- Can be used on the most diverse surfaces: wood, plastic, etc...
- For interior cleaning, in automotive

### Processing Information

- Use with a little bit of water or cleaning product
- On delicate surfaces first make a preliminary test on a part that isn't in sight
- Moisten slightly and rub gently

Title	Length	Width	Height	Color	Material	PU Piece	Article No.
Magic sponge small	11 cm	6 cm	4 cm	White	Melamine	10/30	366782

AGR: 08.540

INTERNAL/Approved (2019-03-22 22:35:16)

## Cleaning cloth

### Ice Scraper / Snow Brush long

- Snow brush included
- Rubber lip for cleaning wet windscreens
- Foam rubber handle for a firm grip



12

Title	PU Piece	Article No.
ICE SCRAPER/SNOW BRUSH LONG	1	131600

AGR: 04.190

### Ice Scraper

- With rubber lip

#### Application Area

- For cars

Title	Length x width	PU Piece	Article No.
Ice Scraper	120 x 122 mm	1	187429

AGR: 04.190



## Coating Skin 600MX2000

- Self-adhesive
- Heat-resistant, even during infrared drying
- No paint bleed
- After wet grinding no second masking needed
- Quick and secure covering

### Characteristics

- Waterproof, lint-free, washable, good paint adhesion

### Technical Data

Material Polyvinyl Chloride (PVC)

Title	Length in m x Width in m	Color	Container	PU Piece	Article No.
PAINTING FOIL GREEN 250M X 1M	250 x 1 m	Green	Roll	1	215028
PAINTING FOIL 120M X 5M	120 x 5 m	Green	Cardboard	1	244121
PAINTING H.-FILMS 400MX2000MM	400 x 2 m	Green	Cardboard	1	838969

AGR: 11.511



12

## Blue Painting Foil

- Particularly suitable for the use of water-based paints
- Does not stain with residual moisture on the vehicle
- Self-adhesive, clings to the vehicle
- No penetration of the color
- No other masking after the wet sanding is required
- Fast and secure cover
- Easier detection of contours allows a precise cut

### Application Area

- Covering of body parts for protection from paint and lacquer mists

### Characteristics

- Water resistant, lint free, washable, good paint adhesion

Title	Length in m x Width in m	PU Piece	Article No.
PAINTING FOIL BLUE 300M X 4M	150 x 4 m	1	215029

AGR: 11.511



INTERNAL/Approved (2019-03-22 22:35:30)

## Transparent Painting Foil

- Particularly suitable for the use of water-based paints
- Does not stain with residual moisture on the vehicle
- Self-adhesive, clings to the vehicle
- No penetration of the color
- No other masking after the wet sanding is required
- Fast and secure cover
- Easier detection of contours allows a precise cut

### Application Area

- Covering of body parts for protection from paint and lacquer mists

### Characteristics

- Water resistant, lint free, washable, good paint adhesion

### Processing Information

- The vehicle must absolutely be dry and clean before establishing the foil, since otherwise it can come to varnish damages



Title	Length in m x Width in m	Color	Container	PU Piece	Article No.
Transparent Painting Foil 300m x 4m	300 x 4 m	Transparent	Roll	1	056239

AGR: 11.511

## Professional Masking paper

- Uncreased on one side (lint free)
- Suitable for commercial quality dispenser
- Especially for water-based paints to prevent strike-through

### Application Area

- Covering of bodywork areas, plates, interior etc. with painting works



### Technical Data

Material Paper

Title	Length in m x Width in m	Color	Container	PU Roll	Article No.
Professional Masking Paper	300 x 0.6 m	Brownish	Roll	1	045936
Professional Masking Paper	300 x 1.5 m	Brownish	Roll	1	045938

AGR: 11.531

### Accessories Available

	PU Piece	Article No.
Mobile Paper Dispenser	1	116960

## Foils

### Cover Paper

- Reduces the penetration of laquers
  - Machine glazed
- Good fit
  - Easy adjustment to edges and corners

### Application Area

- Covering of car body before lacquering work

### Processing Information

- Cut paper to size and attach to the parts that need protecting, with masking tape
- For perfect sealing, double fold the paper at the edges

### Technical Data

Material	Paper
Weight	40 g/m <sup>2</sup>
Elongation min.	1.4 %



Title	Length in m x Width in m	Weight	Color	Container	PU Roll	Article No.
COVER PAPER	225 x 0.45 m	-	Beige	Roll	1	142396
COVER PAPER	225 x 0.6 m	5.3 kg	Beige	Roll	1	142397
COVER PAPER	225 x 0.9 m	8.25 kg	Beige	Roll	1	142398
COVER PAPER	225 x 1.2 m	10.70 kg	Beige	Roll	1	142399

AGR: 11.531



## Door Covering Foil, Self Adhesive

- Excellent sound insulation through the coating with PE foam
- Easy to mount as it is self adhesive
- Excellent adhesion strength

### Application Area

- Protects door coverings against the formation of spots due to condensation

### Characteristics

- Environmentally friendly material, foil strength: 2 mm

### Technical Data

Material PE-coated

Title	Length in m x Width in m	Color	Container	PU Roll	Article No.
Door Covering Foil, Self Adhesive AGR: 11.535	10 x 0.7 m	White	Roll	1	156832



## Door Lower Covering Foil

- Fast and easy mounting

### Application Area

- Protects door coverings against the formation of spots due to condensation

### Characteristics

- Environment friendly PE foil, foil strength: 120 mm

### Processing Information

- Mounting in connection with the door lower covering sealed using adhesive tape or butyl cord



### Technical Data

Material	Polyethylene (PE)
----------	-------------------

Title	Length in m x Width in m	Color	Container	PU Roll	Article No.
Door Lower Covering Foil	100 x 0.7 m	Transparent	Roll	1	070653

AGR: 11.535

### Accessories Available


	PU Amount	Article No.
Adhesive Tape for Door Trim 19 mm	1	070335
Adhesive Tape for Door Trim 38 mm	1	070645
Butyl Round Cor 5m	1	023005

## Air Cushion Foil

- Temperature range between -40°C and +70°C
- Does not contain softeners and free of halogens, chlorine, sulfur and silicones
- Extremely light and flexible protection for sensitive products
- High-quality, resistant plastic foil

### Application Area

- Folding
- Rolling
- Crumpling
- Wrapping

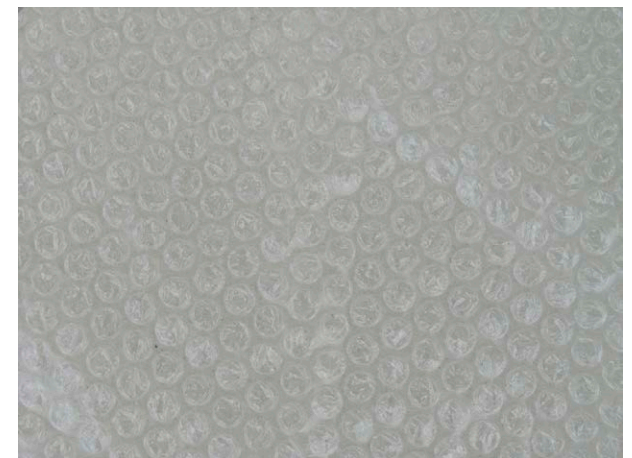
**12**

INTERNAL/Approved (2019-03-22 22:36:12)

Title	Length in m x Width in m	PU Roll	Article No.
AIR CUSHION FOIL 2-PLY AGR: 11.530	150 x 1.2 m	1	061490

## Foils

### Wrap Film

- Protects against transport damages

#### Application Area

- For securing palettes and transport goods

#### Characteristics

- Hand-stretch film out of polyethylene

#### Technical Data

Material

Polyethylene (PE)



Title	Length in m x Width in m	Color	PU Roll	Article No.
Wrap Film AGR: 11.510	270 x 0.5 m	Transparent	1/12	019661

## Dispenser for Wrap Film

- A stable tool for the effortless processing of hand-stretch films
- With the brake, which is incorporated in the handle, one can determine the foil tension und therefore achieve an economic foil consumption

Title	PU Piece	Article No.
HOLDER F.RAPING FOIL 500MM	1	026498

AGR: 11.510



## Single Use - Protective Foil

- Stretchable and slip-resistant
- Extremely tear-resistant

### Application Area

- Protection when transporting workpieces

### Characteristics

- Material thickness:  
Item No. 112795 = 23  $\mu$   
Item No. 153722 = 17  $\mu$

### Processing Information

- Protective foil 125 mm is used together with handle - article 11042.  
Protective foil in roll 0.785 m is for wrapping seats and is used without any additional tools

### Technical Data

Material	Polyethylene (PE)
----------	-------------------





## Single Use Protective Foil

- Stretchable, non-slip
- Extremely tear-resistant

### Application Area

- Protection of steering wheel and gear lever knob
- Transport protection for wooden and metal trim strips

### Technical Data

Material	Plastic
----------	---------



12

INTERNAL/Approved (2019-03-22 22:36:39)

Title	Color	PU Piece	Article No.
Dispenser for Protection Foil	Blue	1	011042

AGR: 11.510

## Premium Protective Cover Fleece for Painters

- The high basis weight guarantees a very good moisture absorption and a high tensile strength - important in places of conductors, for shock absorption during transportation and in the frequency of reuse
- Excellent suitable for protecting high-quality flooring or furniture
- By slip sheet no additional fastening is necessary
- The film-coated nonwoven is completely impervious to paints, thinners, oil, water, plaster, etc.
- Dirt is picked up by the fibers and thus does not redistribute
- Partly designed and cut to size

### Scope Of Delivery

- art. 51750 covering non-woven material 2000mm x 25 meter  
1 pallet = 20 rolls
- art. 3729 covering non-woven material 1000mm x 50 meter  
1 pallet = 12 rolls

### Technical Data

Material Fleece

Title	Length in m x Width in m	Container	PU Piece	Article No.
COVERFLEECE PREMIUM25MX2M 260G	25 x 2 m	Roll	1	051750
Premium Protective Cover Fleece for Painters	50 x 1 m	Roll	1/2/20	003729

AGR: 11.520



## Fleece Cover Classic for Painters

- Excellent suitable to protect flooring or furniture.
- By slip sheet no additional fastening is necessary
- The film-coated nonwoven is completely impervious to paints, thinners, oil, water, plaster, etc.
- Dirt is picked up by the fibers and thus does not redistribute
- Partly designed and cut to size

### Hints


- Due to the somewhat lower basis weight, the moisture absorption, tensile strength and moisture levels are somewhat less effective than the premium fleece cover.

### Technical Data

Material Fleece

Title	Length in m x Width in m	Container	PU Piece	Article No.
UNIVLIES CLASSIC (50 M)	50 x 1 m	Roll	1/2/5/20	241042

AGR: 11.520

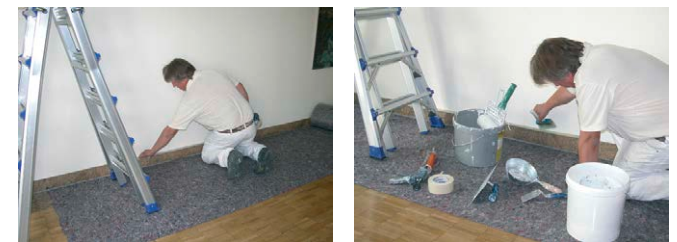

12

## Stair Cover Fleece

- 2 tapes for secure attachment
- versatile on: stairs, radiators, sinks, door frames, u.v.m.
- By slip sheet no additional fastening is necessary
- The film-coated nonwoven is completely impervious to paints, thinners, oil, water, plaster, etc.
- Dirt is picked up by the fibers and thus does not redistribute
- Partly designed and cut to size

### Technical Data

Material Fleece

Title	Length in m x Width in m	Color	Container	PU Roll	Article No.
STAIR FLEECE 25MX330MM	25 x 0.33 m	Grey	Roll	2	209185

AGR: 11.520



INTERNAL/Approved (2019-03-22 22:36:56)

## Construction Foil T100 and T200

- High tear resistance
- 

### Characteristics

- Transparent, no recycled material
- Width: 2000 mm, folded to 1000 mm
- PVC free



Title	Length in m x Width in m	Color	Container	PU Roll	Article No.
CONSTRUCTION FOIL T100 2X50M	50 x 2 m	Transparent	Roll	1	053949
CONSTRUCTION FOIL T200 2X50M	50 x 2 m	Transparent	Roll	1	053950

AGR: 11.530

## Construction Foil Blue T100 RE

### Characteristics

- LDPE-foil out of recycled material
- Width: 2000 mm, folded to 1000 mm
- Thickness: 50 my

### Hints

- Pallet unit: 150 rolls
- Color shade of the foil can differ from roll to roll



12

Title	Length in m x Width in m	Color	Container	PU Roll	Article No.
CONSTRUCTION FOIL T100RE 2X50M	50 x 2 m	Green	Roll	1/150	100001

AGR: 11.530

## Construction foil transparent

- Reliable and robust protection in construction

### Application Area

- To cover as protection against dust, dirt, moisture and plain bearings or slope stabilization
- For temporary construction and covering purposes

### Characteristics

- Color translucent (semi-transparent: transparent, but light to pass through restricted), LDPE film made of recycled material, non-UV-stabilized



INTERNAL/Approved (2019-03-22 22:37:08)

Title	Length	Width	Thickness material	PU Roll	Article No.
CONSTRUCT.FOIL TRANS. 90 4X50M	50 m	4 m	90 µm	1	092736
Construction foil 4x50	50 m	4 m	200 µm	1	342794

AGR: 14.602

## Masking Tape

- Excellent adhesion of the antistatic film to smooth surfaces
- Fast and efficient covering
- Good color and paint adhesion

### Application Area

- Covering of doors, windows, floors etc. during paint work

### Characteristics

- High temperature stability up to +80 ° C/1h Material made of recyclable PE foil



Title	Length	Width	Color	Carrier Plate Material	PU Roll	Article No.
Tissue Exterior Masking Tape	17 m	2660 mm	Blue	Textile	1	172728
Tissue Exterior Masking Tape	20 m	550 mm	Blue	Textile	1	000189
Tissue Exterior Masking Tape	20 m	1100 mm	Blue	Textile	1	172727
Tissue Exterior Masking Tape	20 m	1400 mm	Blue	Textile	1	000287

AGR: 11.910



## Downcomer Alternate

- Is being used at paintwork or plumbing work, if the drainpipe is removed temporarily. The rainwater isn't flowing along the facade, but rather through the film tube.



12

Title	Length in m x Width in m	Container	PU Piece	Article No.
DOWNCOMER ALTERNATE	100 x 0.235 m	Roll	1	047885

AGR: 11.535

INTERNAL/Approved (2019-03-22 22:37:24)


## Foils

### Plan Protection Cover DIN A1 10 Pieces

- A slide fastener
- Submersible to slide shutter is closed

#### Hints

- Carton contains 10 pieces plan Covers

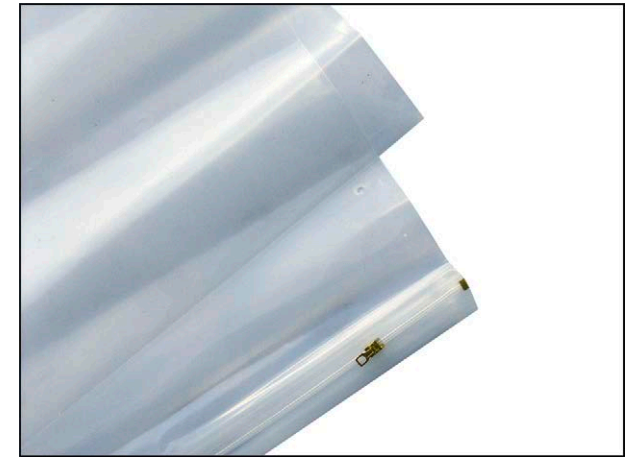

Title	Length in m x Width in m	Color	Container	Number Of blades	PU Package	Article No.
PLAN PROTECT.COVER DINA1 10 ST	0.841 x 0.594 m	Transparent	Cardboard	10 PC	1	054113
PLAN PROTECT.COVER DINA0 10 ST	1.189 x 0.841 m	Transparent	Cardboard	10 PC	1/2	054114

AGR: 08.530

## Tarpaulin Green

- 100% Polyethylen
- 90 g/m<sup>2</sup>
- Waterproof
- Tear resistant
- Reinforced hem around the 100 cm aluminum eyelets (10mm diameter)
- Environmentally friendly
- Flexible and light



### Characteristics

- Environmentally friendly, flexible and light

Title	Length in m x Width in m	Color	PU Piece	Article No.
Tarpaulin Green	3 x 2 m	Green	1	053973
Tarpaulin Green	6 x 4 m	Green	1	053974
Tarpaulin Green	8 x 6 m	Green	1	053975

AGR: 11.530

## Industry Protection Tarpaulin Blue

- 100 % polyethylene
- 180 g
- Waterproof
- Tear-resistant
- Reinforced hem with aluminium-eyelets Ø 10 mm (spacing 100 cm)

### Characteristics

- Economically friendly , flexible and light



Title	Length in m x Width in m	Color	PU Piece	Article No.
INDUSTRY FOIL 6X8	8 x 6 m	Blue	1	059711
INDUSTRY FOIL 6X10	10 x 6 m	Blue	1	059710

AGR: 11.530

## Dust Protection Door

- Opening and locking with the set-in zipper
- Individually cuttable
- Easy mounting with the help of the supplied double-sided adhesive tape
- For all door dimensions up to 1 x 2.30 m

### Application Area

- Dust protection during renovation work



**Characteristics**

- Dust-tight fleece out of polypropylene
- Multifunctional use
- The fleece can be cleaned up by hand washing

**Scope Of Delivery**

- Protection door against dust incl. Double-sided adhesive tape



Title	PU Piece	Article No.
DUST PROTECT DOOR 110X240CM	1	219321
AGR: 11.530		
Accessories Available	PU Amount	Article No.
DS ADH TAPE 38MMX7M	1	239758

## Roofing Membrane RC190

- High permeable at high resistance against intruding water
- Universally useable
- Simple handling and laying compatibility
- Light, antislip and surefootedness
- Recyclable and ecological harmless
- Model roof sheeting RC 190 SK with two-way self-adhesive tape
- CE certified
- Glare-free
- UV stability

### Characteristics

- Especially robust and on the surface waterproofed underlay for direct installation on the thermal insulation or on wood sheathing at all aired and non-aired pitched roofs



Title	Width	Length	Color	PU Roll	Article No.
Roofing Membrane RC190	1.5 m	50 m	Grey / black	1/20	168186

AGR: 14.030



## Vapor Barrier VB20



- Breathable, permeable and airtight vapour barrier
- Sd-Wert = about 20 - 30 m (EN 1931)
- Easy laying (translucent)
- Wind and draught resistant
- Resistant and tear-proof
- Avoids spontaneous condensation
- Recyclable, environmentally harmless
- Easily flammable

### Characteristics

- Permeable, breathable and airtight vapour barrier, which is very easy to lay, used for interior construction, loft conversions, used alone or in conjunction with permeable roof underlays.

### Hints

- Pallet unit: 25 rolls

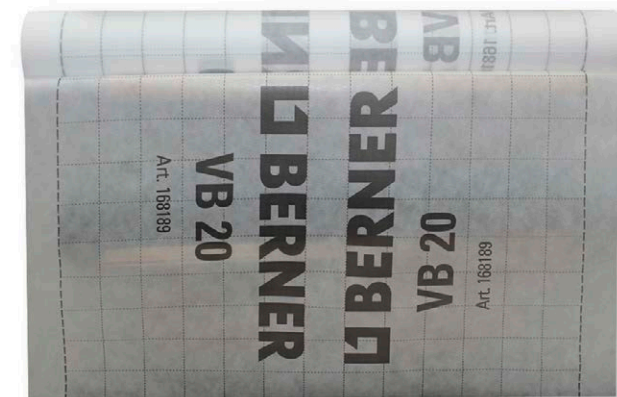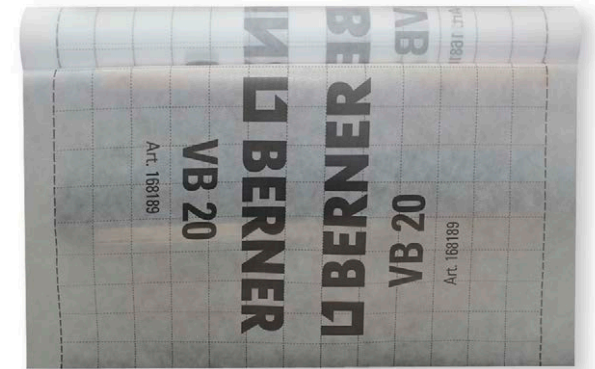


12

Title	Width	Length (m)	Color	PU Roll	Article No.
STEAM BRAKE VB20 1,5 X 50M	1.5 m	50 m	Transparent	1	168189

AGR: 14.030

## Vapor Barrier VB2

- Interior roof-side installation as a vapor barrier, airtight layer
- Roof outer side laying in the restructuring case for well-shaped laying on the rafters, wind and air tightness layer under the rafters
- Diffusible coating protects the supporting structure and insulation from moisture, structural moisture (e. g: from too moist built rafters) is removed from the construction out
- Moisture-regulating properties, controlled dries in summer, avoid condensation in winter comfortable and healthy indoor climate
- Installation-friendly and resistant screening, occlusion flags, translucent design, fiber scrim
- Execution vapor barrier SK with mutual self-adhesive strips

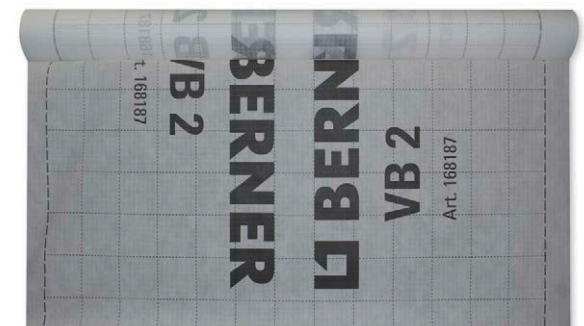

INTERNAL/Approved (2019-03-22 22:38:06)

## Application Area

- To create wind and airtight layers for carpentry, roofing and interior finishing trade

## Processing Information

- The vapor barrier VB2 can also be laid transversely to the sub-structure both longitudinally. During the renovation of the outside is laid parallel to the eaves. The printed smooth side must face the processor. The overlap of the tracks with each other is at least 10 cm (see occlusion flag). Web tension-free and secure them at a distance of up to 30 cm. Joints with sealing tape (Item No. 154315) or diffusion band (Item No. 154316) glue. Penetrations with air sealing sleeves (e.g: cable sleeve Item NO 049779) or connection tape (Item NO 002123) or diffusion tape seal. At masonry and plaster layers stick together by adhesive film with relieving loop. The air tightness must be prepared for all bondings. In the well-shaped installation as rehabilitation vapor barrier from the outside air space free connection on the side of the rafters by gluing or using trellis battens must be guaranteed. Adhere shocks with external applications with diffusion band.

## Hints

- The smooth, printed side is on the inside in getting to the processor

Title	Width	Length	Color	PU Roll	Article No.
STEAM BRAKE VB5 1,5 X 50M	1500 mm	50 m	white/ translucent	1	208993

AGR: 14.030

## Underlay Membrane 150

- Highly diffusion-open
- Strongly resistant against water penetration
- UV-stable
- Non-glare
- Tear-resistant
- CE conform
- Slip-resistant and step-proof
- Roofing membrane 150 self adhesive version

## Application Area

- To produce underside covers on steep roofs
- Also suitable as temporary cover (using additional measures)



## Processing Information

- The Berner Roofing Felt is installed horizontally with an overlap of approx. 15 cm (see overlap line) on the thermal insulation or at a right angle to the rafters, without tension and sagging.
- When falling below the standard roof slope, local building installation regulations and instructions must be taken into account.
- When used in the roof ridge area, installation over the roof ridge is done with an overlap of approx. 30 cm.
- Nail sealing tape is used for optimal sealing of the nail holes.
- Non-insulated attics require adequate ventilation.
- Diffusion tape is used to repair minor damages and to tape off butt and overlap edges.
- The sheet may be installed directly on the thermal insulation or rafters with recommended overlap.

## Hints

- To ensure the proper function of the roofing felt, the entire roof structure must be built in accordance with applicable local regulations and guidelines.
- Additional precautions must be taken in case of extreme weather conditions (e.g. continuous or driving rain, etc.).
- The Berner roofing membranes are laid horizontally with a covering of 10 cm (for 150SK) and 10 cm or 15 cm (for 150) overlap (see overlap line) on to the thermal insulation or at a right angle to the rafters stress-free and without sagging misplaced. If the roof slope falls below the standard roof slope, regional regulations and norms must be considered. When used in the ridge area, the maying over the ridge with approx. 30 cm overlap. In the overlapping area, roofing membrane 150 and 150SK must be fastened in a concealed manner. Fixing is carried out step by step with the fixing of the counter battens. Nail sealing tape is used for optimum sealing of the nail holes and as a temporary covering. Sufficient ventilation must be provided for uninsulated pointed floors. The repair of minor damage and the masking of the joint and overlap edges is carried out with BERNER OI sealing tape

## Technical Data

Material	Three layers: Two PP fleece layers, microporous film
Color	Grey / black
Surface Weight	150 g/m <sup>2</sup>

## Foils

Sd-value	0.02 m
Fire Behavior	Euroclass E
Tensile strength along/across	310/215 N / 50 mm
Maximum tensile strength along/across	165/190 N
Elongation along/across	45/80 %
Resistance to water penetration	W1
Processing temperature	>5 °C
Temperature resistance	-40 °C - 80 °C
Suitable for temporary roofing	4 weeks with suture and perforation protection
UV resistance in months	3

Title	Length	Width	Version	PU Roll	Article No.
Underlay membrane	50 m	1.5 m	with SK	1	363624

AGR: 14.200

## Double Side Tape for Doors


- High maintenance and yet after max. 7 days again residue-free removal

### Characteristics

- Support of textile fabric with acrylate dispersion adhesive
- For short-term bonding max. 7 days
- No direct UV radiation
- Perform test bonding in an inconspicuous place

### Hints

- In natural stone (eg. Marble) and sensitive substrates is not recommended

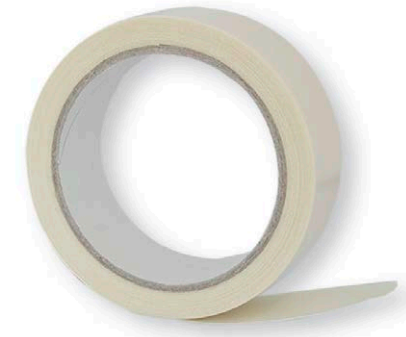

12

Title	Length	Width	PU Roll	Article No.
DS ADH TAPE 38MMX7M	7 m	38 mm	1	239758

AGR: 11.912

## Double-Sided Adhesive Tape

- Very strong adhesive strength
- Weather proof against humid weather conditions
- Protects against humid weather conditions
- Minimizes vibrations
- Extremely ageing resistant, UV-resistant, weather-resistant and plasticizer resistang
- Support foam is permanently elastic
- Maximum final strength after 24 hours

### Application Area

- Fastening of ornamental strips, emblems and logos and mirrors

### Characteristics

- Masking: PE Foil
- Thickness 0.9 mm

### Processing Information

- Adhesion surfaces must be dry, clean and free of grease

### Technical Data

Carrier Plate Material	Special paper
------------------------	---------------



INTERNAL/Approved (2019-03-22 22:38:29)



## Adhesives tapes

Temperature resistance

-40 °C - 95 °C

Title	Length	Width	Thickness	Color	PU Roll	Article No.
Double-Sided Adhesive Tape	25 m	6 mm	0.9 mm	black	1	632686
Double-Sided Adhesive Tape	25 m	12 mm	0.9 mm	black	1	101176
Double-Sided Adhesive Tape	25 m	19 mm	0.9 mm	black	1	101184
Double-Sided Adhesive Tape	25 m	25 mm	0.9 mm	black	1	147303

AGR: 11.912

## Double-Sided Adhesive PE-Tape

### Technical Data

Adhesive Strength	41 N/25mm
Processing temperature	10 - 49 °C
Temperature resistance	-20 °C - 100 °C



Title	Length	Width	Thickness	PU Roll	Article No.
DBL SDD PE TAPE 0,25MM	10 m	19 mm	0.25 mm	1	130346

AGR: 11.912

## Double-Sided Transparent Tape

- Very high adhesive strength
- weather resistance
- Protects against moisture infiltration
- vibration retardant

### Application Area

- Attaching trim, emblems and lettering

### Characteristics

- Thickness: 0.9 mm
- Cover: PE film
- Temperature Resistance: - 40 ° C to + 120 ° C
- Adhesive: Acrylic





- Color: transparent
- Adhesive strength: 34N / 25mm

## Processing Information

- Surfaces must be dry, clean and free of grease

## Technical Data

Temperature resistance -30 °C - 180 °C

Title	Length	Width	Thickness	Color	PU Roll	Article No.
Double-Sided Adhesive Tape	10 m	6 mm	0.9 mm	Transparent	1	209183
TRANSP.DBL SDD TAPE 9MMX10M	10 m	9 mm	-	-	1	240142
Double-Sided Adhesive Tape	10 m	12 mm	-	Transparent	1	209191
Double-Sided Adhesive Tape	10 m	19 mm	-	Transparent	1	092847

AGR: 11.912

## Adhesive Tape for Door Trim

- Instant adhesion without Does not contaminate upon adhesion to surface
- Double-sided adhesive
- Does not contaminate upon adhesion to surface

## Application Area

- Fastening of door sub-disguising foil

## Processing Information


- Adhesive surfaces must be dry, clean and free of grease

## Technical Data

Temperature resistance -40 °C - 100 °C

Title	Length	Width	Color	PU Roll	Article No.
Adhesive Tape for Door Trim	50 m	12 mm	Transparent	1	352040
Adhesive Tape for Door Trim	50 m	19 mm	Transparent	1	070335
Adhesive Tape for Door Trim	50 m	38 mm	Transparent	1	070645
DOOR A-VKL-ADH TAPE 50MX50MM	50 m	50 mm	Transparent	1	147290

AGR: 11.910

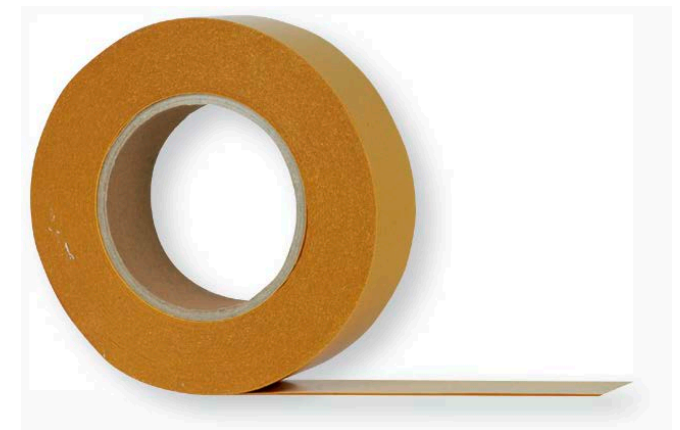

## Tape for Positioning Panes

- Soft and supple quality
- Resistant to aging
- Insensitive to moisture
- Excellent thermal insulation values
- High level of elasticity

### Application Area


- Positioning tape for changing panes on automobiles

### Characteristics

- Adhesive on one side, fine pores and closed cells with a smooth surface, indecomposable  
Material thickness: 4 mm

### Processing Information

- Surfaces to be glued must be clean, dry and free from grease



Title	Length	Width	Color	PU Roll	Article No.
Pane Glazing Tape	20 m	6 mm	Anthracite	3	882933

AGR: 11.400

## Adhesive Tape Transparent

- High tear-resistancy
- Easy unwinding
- Transparent

### Application Area

- Universally applicable for all kind of packagings



Title	Length	Width	Color	PU Roll	Article No.
ADH TAPE TRANSP.66/25 PP	66 m	25 mm	Transparent	1	147311
ADH TAPE TRANSP.66/50 PP	66 m	50 mm	Transparent	1	950310

AGR: 11.910

## Packaging Tape Dispenser

- Universally useable for all commercial packaging tapes up to a roll width of 50 mm

Title	PU Piece	Article No.
HAND UNCOILER F.ADH TAPE 66/50 AGR: 11.916	1	387649



## Adhesive Tapes

### Characteristics

- Tear-resistant due to an aluminized polypropylene foil
- High adhesion due to an acrylic adhesive cover
- Resistant against moisture, diluted alkaline and acids



Title	Length	Width	Thickness	Color	PU Piece	Article No.
ALU-ADH TAPE 50MM/50M	50 m	50 mm	0.035 mm	Aluminium	1/6/96	114259

AGR: 11.302

## Alumium Tape Top

### Characteristics

- Tear-resistant due to an aluminized polypropylene foil
- High adhesion due to an acrylic adhesive cover
- Resistant against moisture, diluted alkaline and acids



Title	Color	Length	Width	Thickness	PU Roll	Article No.
ALU TAPE TOP 50MMX50M	Aluminium	50000 mm	50 mm	0.07 mm	1	094391

AGR: 11.302

## Textile Adhesive Tape

- Completely tear resistant, even under strain
- Very good adhesive properties
- Optimally cuttable by hand
- All-purpose
- High-strength special fabric

### Application Area

- Fixing, bonding, fastening, sealing and protection of edges made from different materials

### Characteristics

- PVC free

### Processing Information

- Surfaces to be glued must be clean, dry and free from grease

### Technical Data

Carrier Plate Material

Textile



Title	Length	Width	Thickness	Color	PU Roll	Article No.
Textile Adhesive Tape	50 m	19 mm	0.30 mm	black	1	885398
Textile Adhesive Tape	50 m	25 mm	0.30 mm	black	1	880485
Textile Adhesive Tape	50 m	50 mm	0.26 mm	black	1	885401
TEXTILE-ADH TAPE PREM 50M 50MM	50 m	50 mm	0.30 mm	black	1	215537

AGR: 11.916



## Fabric Adhesive Tape

- Flexible and adaptable
- Good initial tack and permanent adhesive force
- Easy unrolling and tearing
- Excellent corrosion resistance
- Easy to tear by hand
- Excellent abrasion resistance

### Application Area

- Uncoated self-adhesive fabric-based, general purpose, inter alia, suitable for manual bunched wires or harnesses specifically in motor vehicles

### Characteristics

- Uncoated self-adhesive tape on rayon fabric base

### Processing Information

- Surfaces must be dry, clean and free of grease



Title	Length	Width	Color	PU Roll	Article No.
RAYONFIBRE ADH TAPE 19MMX50M	25 m	19 mm	black	1	215105

AGR: 11.916

## Building Protection Tapes

- Quick tearing of due to a cross-grooved surface

### Application Area

- Range of application on all smooth surfaces


### Characteristics

- UV-resistant
- Soft PVC

### Technical Data

Carrier Plate Material

PVC



Title	Length	Width	Color	PU Roll	Article No.
BUILDG PROT.GROOVED 33M 30MM	33 m	30 mm	Yellow	1/60	850979
BUILDG PROT.GROOVED 33M 50MM	33 m	50 mm	Yellow	1/36	850993

AGR: 11.916

## Cleaning Tape White


- High adhesion on all materials(e.g. wood, metal, aluminium, plastic)
- High UV-resistancy and weather-resistancy (can be pulled off residue-free up to 4 weeks)

### Application Area

- Plaster chord for the sealing of windows, doors, formwork, shutters, markings etc.

### Characteristics

- Temperature resistancy: -5°C up to 70°C
- Thickness: 0.15 mm

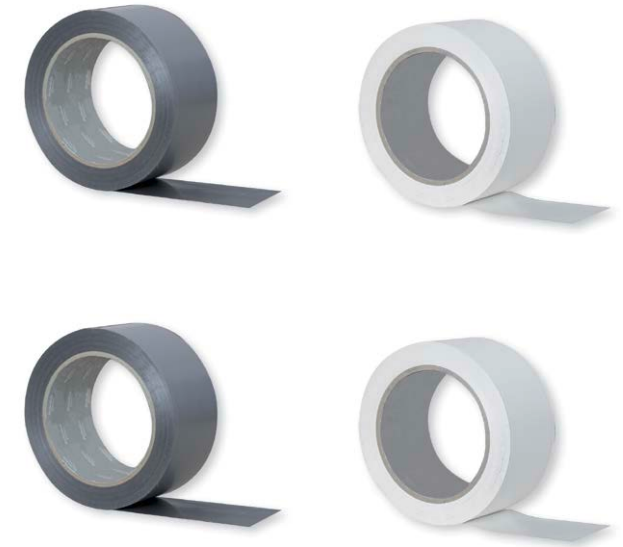

Title	Length	Width	Color	PU Roll	Article No.
FINERYTAPE GREY 50MM X 33M	33 m	50 mm	Grey	1/18	143555
FINERYTAPE WHITE 50MM X 33M	33 m	50 mm	White	1/18	143554

AGR: 11.916

## UV-tape

- LDPE coated fabric carrier with a high-quality special adhesive
- excellent adhesive properties with a high track even on low temperatures
- good adhesive bonding on different surfaces
- strong low-stretch carrier, can be teared off by hand
- good unrolling property
- plastizizer-free

### Application Area

- Interior and exterior area - surfaces - coverings/surface protection durin paintwork and plastering work
- Up to 4 weechs (max. 2 weeks in the exterior area and ma. 4 weeks in the interior area) residual-free removal from most surfaces (during average solar radiation)
- Suitable for smooth non-porous surfaces



Title	Length	Width	PU Roll	Article No.
UV-tape	25 m	38 mm	1/30	218866
UV-tape	25 m	50 mm	1/30	218865

AGR: 11.916

## Electrical insulation tape 2705

- Premium quality
- High dielectric strength and mechanical protection
- Excellent resistance to abrasion, corrosion and moisture
- Excellent conformability
- Lead free
- IMQ and VDE approved
- Conforms to BS3924 and the European Directive 2000/53 EC
- Highly flexible

### Application Area

- Harnessing
- Protection for low and medium voltage cable splices
- Typically engineered for the professional requirements of telecom and electricity boards
- Primary electrical insulation
- Colour coding

### Hints

- The tape should be applied with sufficient tension to ensure an optimum bonding and a minimum of two layers with a half overlap.
- The final layer should be wrapped with a lower tension to prevent flagging effects.
- Surfaces should be clean, dry and free of dust, grease, oil or other contaminants.
- Flammability: the tape is self extinguishing.
- Dielectric strength: 40kV / mm.

### Technical Data

Carrier Plate Material	PVC
Adhesive Strength	35 N/25mm
Elongation min.	180 %
Temperature range	-40 - 105 °C

Title	Color	Length	Width	Thickness	PU Piece	Article No.
PVC adhesive tape 2705	black	20 m	30 mm	0.18 mm	1	362772

AGR: 11.310

INTERNAL/Approved (2019-03-22 22:40:00)

## Silicone tape

- Self-welding duct tape out of silicone
- Permanent airtight and watertight sealing
- Temperature resistancy -65°C up to 260°C
- UV-resistant and weather-proof
- Clean removing of the tape

### Application Area

- Reparation of leakages, sealings of tubes and pipes
- Insulating of electrical wiring

### Processing Information

- Remove the protective foil
- Stretch during the application of the strip to the treefold of the initial length
- Wrap the repair object afterwards with an overlap of approx. 50 %
- Self-amalgamation within a matter of minutes

### Hints

- Shelf life: at least 60 month

### Technical Data

Pressure Resistance	12 bar
Temperature range	-65 - +260 °C
Processing temperature	0 - +35 °C
For voltage up to	8000 V



Title	Color	Length	Width	Thickness	PU Roll	Article No.
Silicone tape	Transparent	3 m	25 mm	0.5 mm	1	249810
Silicone tape	black	3000 mm	25 mm	0.5 mm	1	244677

AGR: 11.390



## Electrical Insulation tape

- High dielectric strength
- Excellent resistance to abrasion, corrosion and moisture
- Highly flexible
- High mechanical protection
- VDE tested (The VDE Association for Electrical, Electronic and Information Technology)
- Lead, chromium VI, mercury and cadmium free

### Application Area

- Used for the insulation of electric wires, plugs, electrical connectors
- Harnessing
- Colour coding
- Industrial applications

### Technical Data

Carrier Plate Material		PVC
Adhesive Strength		35 N/25mm
Elongation min.	170 %	180 %
Temperature range	-10 - 90 °C	-40 - 105 °C



Title	Color	Length	Width	Thickness	PU Amount	Article No.
Electrical Insulation Tape PVC	Blue	10 m	15 mm	0.15 mm	1/10	049584
ISO-TAPE 0,15X50X10M BLUE	Blue	10 m	50 mm	0.15 mm	3	336042
Electrical Insulation Tape PVC	Brown	10 m	15 mm	0.15 mm	1/10	049592
Electrical Insulation Tape PVC	Green	10 m	15 mm	0.15 mm	1/10	049596
Electrical Insulation Tape PVC	Grey	10 m	15 mm	0.15 mm	1/10	049595
Iso Tape	Grey	10 m	30 mm	0.15 mm	5	336039
ISO-TAPE 0,15X50X10M	Grey	10 m	50 mm	0.15 mm	3	336043
ISO-TAPE 0,15X15X10M ORANGE	Orange	10 m	15 mm	0.15 mm	1/10	049599
ISO-TAPE 0,15X15X10M VIOLET	Purple [2]	10 m	15 mm	0.15 mm	1/10	049601
Electrical Insulation Tape PVC	Red	10 m	15 mm	0.15 mm	1/10	049598
ISO-TAPE 0,15X50X10M RED	Red	10 m	50 mm	0.15 mm	3	336044
Electrical Insulation Tape PVC	White	10 m	15 mm	0.15 mm	1/10	049602

INTERNAL/Approved (2019-03-22 22:40:15)

## Adhesives tapes

Title	Color	Length	Width	Thickness	PU Amount	Article No.
ISO-TAPE 0,15X50X10M WHITE	White	10 m	50 mm	0.15 mm	3	339347
Electrical Insulation Tape PVC	Yellow	10 m	15 mm	0.15 mm	1/10	049593
ISO-TAPE 0,15X50X10M YELLOW	Yellow	10 m	50 mm	0.15 mm	3	336045
PVC Electrical Insulation Tape	black	10 m	15 mm	0.15 mm	1/10	049600
ISO-TAPE 0,15X50X10M BLACK	black	10 m	50 mm	0.15 mm	3	336041
Electrical Insulation Tape PVC	black	20 m	19 mm	0.18 mm	8	049574
Electrical Insulation Tape PVC	green / yellow	10 m	15 mm	0.15 mm	1/10	049594
ISO-TAPE 0,15X50X10M ISO GREY	isogrey	10 m	50 mm	0.15 mm	3	339399
ISO-TAPE 0,15X15X10M MIXED	mixed	10 m	15 mm	0.15 mm	1	049597

AGR: 11.310

### Multi-Purpose Tape

- Self-welding
- Dielectric strength 40 KV / mm
- Temperature resistant from -40 ° C to +90 ° C
- UV-resistant

#### Application Area

- Insulation and sealing of electrical cables, plugs, connectors, pipes, hoses

#### Technical Data

Temperature range -40 - 90 °C




Title	Color	Length	Width	Thickness	PU Roll	Article No.
Multi-Purpose Tape 10 m	black	10000 mm	19 mm	0.5 mm	1	108039

AGR: 11.916

### Power Sealing Tape

#### Characteristics

- UV, weather and temperature resistant
- Adheres to most surfaces

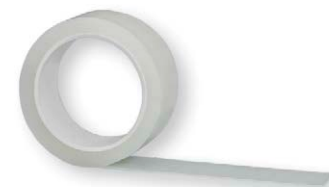

- Recoatable
- Very high initial tack
- Versatile, high adaptability

## Processing Information

- Clean surfaces before the bonding process.

## Technical Data

Adhesive Strength	100 N/25mm
Elongation min.	350 %
Temperature range	-20 - +70 °C
Processing temperature	+15 - +30 °C



12

Title	Length	Width	Thickness	PU Roll	Article No.
Power Sealing Tape	5 m	38 mm	1 mm	1	329146
Power Sealing Tape	5 m	80 mm	-	1	336449

AGR: 11.916

## Thread Sealing Tape PTFE

### Application Area

- For the sealing of hose connections, pipe connections and so on

### Characteristics

- Gas-tight



Title	Color	Length	Width	Thickness	PU Roll	Article No.
TEFLON-THRD.SEALNG.TAPE	White	12000 mm	12 mm	0.1 mm	1/250	150707

AGR: 11.916

## PTFE Thread Sealing Tape

- Approved by the DVGW (German Technical and Scientific Association for Gas and Water)
- Quick and easy processing
- Suitable for gas pipelines

### Application Area

- Used for the sealing of metallic threaded connections on drinking water, gas and heating pipes
- Sealing of hose connections, pipe joints

### Characteristics

- DVGW tested according to DIN EN 751-3
- Appropriate for gas installations

### Processing Information

- Processed as normal adhesive tape

### Hints

- Art. Nr. 042 889, fine thread with 60 g / sqm
- Art. No. 155328, coarse thread with 100g / sqm

### Technical Data

Material	Polytetrafluorethylene (PTFE)
Temperature range	-200 - 260 °C



Title	Color	Length	Width	Thickness	PU Roll	Article No.
THREADSEALINGB. PTFE COAR THRD	White	12000 mm	12 mm	0.1 mm	1/10	155328
Threads sealing tape, white core fine thread	White	12000 mm	12 mm	0.1 mm	1/10	042889

AGR: 11.916

## PTFE bobbin

- Clean and simple processing, as ready to use on a roll
- Immediate and universal sealing of hot, cold water, gas and compressed air systems
- Handy and easy to carry
- With silicone oil-impregnated multifilament
- High time saving through easy and quick application
- Readjustment of the pipe joint after application
- still possible
- High pressure and temperature resistance (gas mark 5 bar / -20 ° C to +70 ° C, drinking water: 16 bar / +95 ° C, hot water: 7 bar / + 130 ° C)

### Application Area

- Universal pipe thread sealant for fast, easy and reliable seal during installation
- Metal compounds and most plastic threaded connections:
- Steel, galvanized, nickel and chrome-plated steel, stainless steel, cast iron, brass, bronze,
- PVC, PP, PE

### Characteristics

- DVGW approval (Reg, DV-5142 AU 0166)
- Suitability for drinking water systems (KTW recommendation of the Federal Health Office)
- For threads up to 4 inches

### Processing Information

- Clean the threads if necessary and roughen. Then wrap the thread with sealing thread tension in the direction of the pipe thread.
- A direct placement of the sealing thread in the threads is not necessary.
- Number of windings corresponding to the thread sizes into account on the packaging.



Title	Container	PU Can	Article No.
PTFE bobbin	Can	1/48	075842

AGR: 11.916



## Gasline seal tape

- Generates a P.T.F.E.-film during the connection of the threads
  - ▶ in the exactly required strength
- Total chemical resistance against the
  - ▶ the most aggressive chemicals, solvents and acids
- Applicable at temperatures from -200 °C up to +240 °C

### Application Area

- Immediately applicable at metal connections and plastic connections
- Installation directly out of the handy dispenser with a unique cutter
- Replaces all other sealents

### Characteristics

- Backtwist up to 45° tested and certified by DVGW

### Hints

- Not authorized for gas installations in Austria



12

Title	PU Piece	Article No.
THREAD SEAL. THREAD TWINEFLON AGR: 11.916	1/12	239770

## Connection Adhesive Tape EC1 Plus

- Flexible LDPE foil
  - ▶ Stable polyester scrim
- Slightly flexible, thus durably airtight even in the case of structural movements
  - ▶ DIN- compliant attachment
  - ▶ Adhesive highly resistant to ageing
- Extreme adhesive strength
  - ▶ Special high-performance adhesive




## Adhesives tapes

### Application Area

- airtight mounting of penetrations

### Hints

- Bonding is achieved by applying the foil around the building component like scales, one half on the component and one half on the vapour barrier.
- In the case of OSB board joints we recommend pressing on firmly with a hard rubber roller as well.

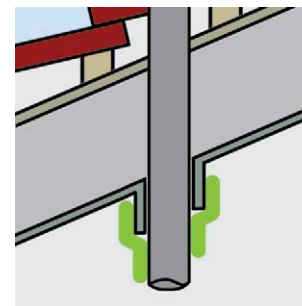

### Technical Data

Adhesive Strength	35 N/25mm
Temperature range	-40 - 100 °C
Processing Temperature, From	5 °C

Title	Length	Width	Thickness	Color	PU Roll	Article No.
Connection Adhesive Tape EC1 Plus	25 m	60 mm	0.28 mm	Green	1/10	363630

AGR: 11.010

## Sealing Adhesive Tape EC1 Plus

- Very adhesive
- Adheres even at extremely low temperatures
- No drying out or brittleness by aging resistant acrylic adhesives
- Easy processing thanks to snapping off by hand
- Splash-proof
- Free from halogens, solvents, chlorine and bitumen

### Application Area

- Permitted according to DIN 4108-7 for airtight adhering and sealing of overlaps on vapour barrier sheets

### Characteristics


- The Berner's connection tape is very strong adhesive and holds even at extremely low temperatures

### Processing Information

- Surfaces must be firm in itself, be clean, dry and free of grease

### Technical Data

Adhesive Strength	35 N/25mm
Temperature range	-40 - 100 °C
Processing Temperature, From	-10 °C
Processing Temperature, To	40 °C

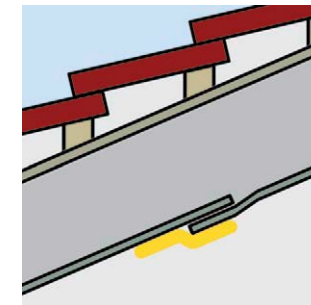

Title	Length	Width	Color	PU Roll	Article No.
Sealing Adhesive Tape	40 m	60 mm	Yellow	1	154315

AGR: 11.010

## Adhesives tapes

### Diffusion Tape

- Vapor diffusion
- Water resistant
- Highly adhesive rubber material
- High tensile strength
- Free from halogens, solvents, chlorine and bitumen

#### Application Area

- Adhesion of overlaps with permeable roof underlays
- Repair and port bonding permeable roofing underlays

#### Processing Information

- Surfaces must be firm, dry and free from dust and grease

#### Technical Data

Adhesive Strength	12 N/25mm
Elongation min.	29 %
Temperature range	-30 - 85 °C



Title	Length	Width	Color	PU Roll	Article No.
Diffusion Tape	50 m	75 mm	White	1	154316

AGR: 11.010

## Butyl Nail Sealing Tape

- High flexibility
- High adhesive power
- Very good adhesive properties on virtually all building materials as long as they are clean and oil-free
- Does not contain solvents
- Suitable for all PE-based vapor barrier foils

### Application Area

- Double-sided butyl tape made with light and aging resistant special rubber
- Used for e.g. adhesion of plastic-based steam and vapor barriers, lead-ins, corners and joints, roofing underlay and many other building materials

### Processing Information

- All surfaces must be dry, grease, oil and dust free in order to achieve optimal adhesion
- For use below + 5 ° C, the use of a heat gun is recommended

### Technical Data

Temperature range	-30 - 80 °C
Processing Temperature, From	5 °C
Processing Temperature, To	35 °C



Title	Length	Width	Thickness	Color	PU Amount	Article No.
Butyl Nail Sealing Tape	30 m	40 mm	1 mm	Grey	1/7	091187

AGR: 11.010

### Nail Sealing Tape PE

- Permanent, high elasticity
- Highly adhesive

#### Application Area

- Adhesive tape made of closed cell PE foam for sealing between the counter-batten and roofing underlay against intrusion of moisture and impact- rain in perforations of the roofing underlay

#### Processing Information

- Surfaces must be clean, dry and free of oil, grease and dust free. The surface of the nail sealing tape can not be treated by paints, coatings, or the like. For optimum seal the tape when installed must be compressed to at least 50% of its original strength.

#### Hints

- Packed to 12 rolls à 30 meter



Title	Length	Width	Thickness	Color	PU Carton	Article No.
PE Nail Sealing Tape	360 m	45 mm	3 mm	black	1	099218

AGR: 11.010




## Marking Tape BL./YE. 48mm x 33M

### Technical Data

Adhesive Strength	3 N/25mm
Tensile Strength	78.5 N/mm <sup>2</sup>
Temperature resistance	-30 °C - 80 °C



12

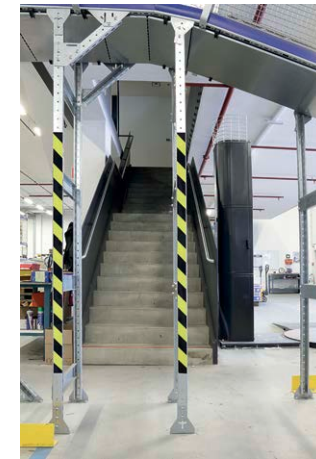

Title	Length	Width	Thickness	Color	PU Roll	Article No.
Marking Tape BL./YE. 48 mm x 33m	33 m	48 mm	0.2 mm	black-yellow	1	341715

AGR: 11.916

INTERNAL/Approved (2019-03-22 22:42:31)

## Nail Sealing Tape PE

- Permanent
- Strongly adhesive
- Highly elastic
- Compliant with ZVDH regulations



### Application Area

- Single-sided adhesive tape for sealing between the counter-batten and roofing underlay
- To protect against the infiltration of moisture and rain into perforations of the roofing underlay

### Processing Information

- Surfaces must be clean, dry and free of oil, grease or dust.
- The surface of the nail sealing tape cannot be treated by paints or coatings
- Apply nail sealing tape either on the roofing sheet or on the counter-batten
- Fasten the counter-batten to the underground by screwing or nailing the tape
- Press tape firmly

### Technical Data

Material	Polyethylene (PE)
Temperature Resistance, To	80 °C
Temperature range	-30 °C
Processing Temperature, From	5 °C

Title	Length	Width	Thickness	Rolls per box	PU Carton	Article No.
Nail Sealing Tape	30 m	50 mm	3 mm	10	1	368254
Nail Sealing Tape	30 m	60 mm	3 mm	8	1	368255
Nail Sealing Tape	30 m	70 mm	3 mm	7	1	368253
Nail Sealing Tape	30 m	80 mm	3 mm	6	1	368256

AGR: 11.010

## Duct Tape Standard

- Excellent adhesion and conformability
- Excellent tack
- Long lasting adhesion
- Waterproof backing
- Hand tear able

### Application Area

- General purpose tape suitable for bundling, sealing, seaming, repairing, holding, plumbing and waterproofing

### Hints

- Backing: Polyethylene reinforced with polyester cloth
- Adhesive: Synthetic rubber, solvent free

### Technical Data

Adhesive Strength	25 N/25mm
Elongation min.	25 %
Tensile Strength	35 N/cm
Temperature resistance	-10 °C - 70 °C

Title	Length	Width	Color	PU Piece	Article No.
Duct tape Standard	25 m	50 mm	Silver	1/36	365919
Duct tape Standard	50 m	50 mm	Silver	1/24	365920

AGR: 11.391




12

## Flex Tape Exterior EPDM

- Extreme weather and temperature resistant
- high elasticity
- Very durable, thus a high tensile strength

### Application Area

- For the external sealing of the lower terminals with front doors, balcony / patio doors, native windows for perimeter area or base area and conservatories and facades according to DIN 18195

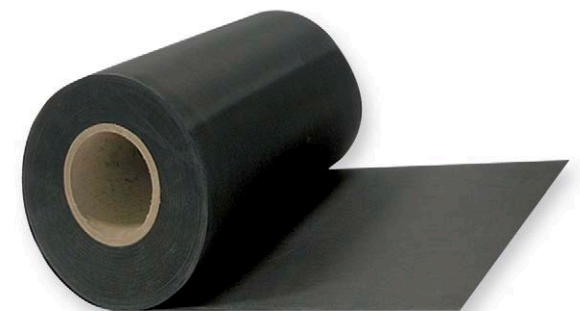

## Characteristics

- For outdoor use
- Vapour-permeable
- waterproof
- UV-resistant
- bitumen resistant

## Processing Information

- Surfaces must be dry and free of oil, grease, dust and other contaminants ingredients.
- Cut ribbon to desired length. The surfaces should be bonded with adhesive coat. Press the EPDM tape on the ground and possibly solve again, so for larger areas, the solvent can evaporate from the adhesive. Thereafter, stick the EPDM tape to the designated surface and carefully press down with the help of a pressure roller. In the processing of EPDM Flex tape adhesive no primer is required for proper and professional preparation. Basically, the EPDM is installed Flex belt tension. At the window, the tape is mounted in addition to a pressure lath, terminals or other mounting, as described in DIN 18195.



## Technical Data

Elongation min.	300 %
Tensile Strength	8 N/mm <sup>2</sup>
Peel strength	25 N/mm
Water Vapor Diffusion Resistance	5882 μ
Temperature range	-30 - 75 °C
Processing Temperature, From	+5 °C
Fire Behavior	Euroclass E

Title	Length	Width	Thickness	Sd-value	PU Roll	Article No.
FLEXT. EPDM 100 X 0,8MM 20M	20 m	100 mm	0.8 mm	4.7 m	1	129564
FLEXT. EPDM 150 X 0,8MM 20M	20 m	150 mm	0.8 mm	4.7 m	1	129563
FLEXT. EPDM 200 X 0,8MM 20M	20 m	200 mm	0.8 mm	4.7 m	1	129562
FLEXT. EPDM 250 X 0,8MM 20M	20 m	250 mm	0.8 mm	4.7 m	1	129561
FLEXT. EPDM 300 X 0,8MM 20M	20 m	300 mm	0.8 mm	4.7 m	1	129560

AGR: 11.110

## Flex Tape Uni Exterior EPDM

- Extreme weather and temperature resistant
- high elasticity
- Very durable, thus a high tensile strength

### Characteristics



- For outdoor use
- Vapour-permeable
- waterproof
- UV-resistant
- bitumen resistant

### Processing Information

- Surfaces must be dry and free of oil, grease, dust and other contaminants ingredients.
- Cut ribbon to desired length. The surfaces should be bonded with adhesive coat. Press the EPDM tape on the ground and possibly solve again, so for larger areas, the solvent can evaporate from the adhesive. Thereafter, stick the EPDM tape to the designated surface and carefully press down with the help of a pressure roller. In the processing of EPDM Flex tape adhesive no primer is required for proper and professional preparation. Basically, the EPDM is installed Flex belt tension. At the window, the tape is mounted in addition to a pressure lath, terminals or other mounting, as described in DIN 18195.

### Technical Data

Elongation min.	300 %
Water Vapor Diffusion Resistance	5882 $\mu$
Temperature range	-30 - 75 °C
Processing Temperature, From	5 °C
Fire Behavior	Euroclass E

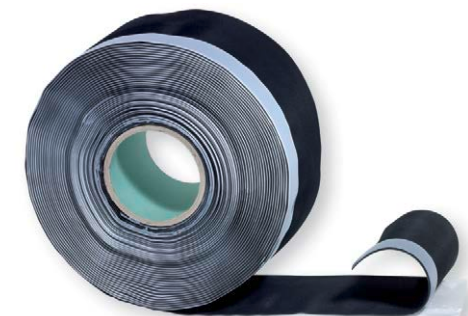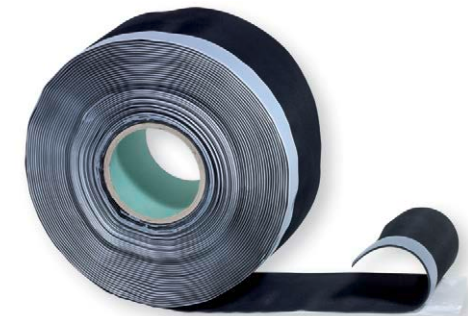

12





## Adhesives tapes

Title	Length	Width	Thickness	Sd-value	PU Roll	Article No.
FLEXT. EPDM/BUTYL 100X0,8 20M	20 m	100 mm	0.8 mm	4.7 m	1	155103
FLEXT. EPDM/BUTYL 150X0,8 20M	20 m	150 mm	0.8 mm	4.7 m	1	155134
FLEXT. EPDM/BUTYL 200X0,8 20M	20 m	200 mm	0.8 mm	4.7 m	1	155137
FLEXT. EPDM/BUTYL 250X0,8 20M	20 m	250 mm	0.8 mm	4.7 m	1	155162
FLEXT. EPDM/BUTYL 300X0,8 20M	20 m	300 mm	0.8 mm	4.7 m	1	155147

AGR: 11.110

### Flextape VF

- Highly adhesive
  - One side fully self-adhesive
  - The other side with a 20 mm mounting strip
- Universally applicable for all kinds of window frames
- Can be plastered or painted over



### Application Area

- Quick and secure sealing of window seams

### Technical Data

Temperature range	-40 - 80 °C
Processing Temperature, From	-10 °C
Processing Temperature, To	40 °C
Fire Behavior	Euroclass E

Title	Length	Width	Color	Sd-value	PU Roll	Article No.
Flextape VF inside	40 m	70 mm	White	30 m	1	368661
Flextape VF outside	40 m	70 mm	black	3.8 m	1	368590

AGR: 11.110 / 11.111



## Masking Tape


- Tearproof
- Finely creped
- Temperature resistant from -30 ° C to +100 ° C

### Application Area

- Taping during painting works and fastening of foils, painting and masking paper

### Technical Data

Temperature resistance -30 °C - 100 °C

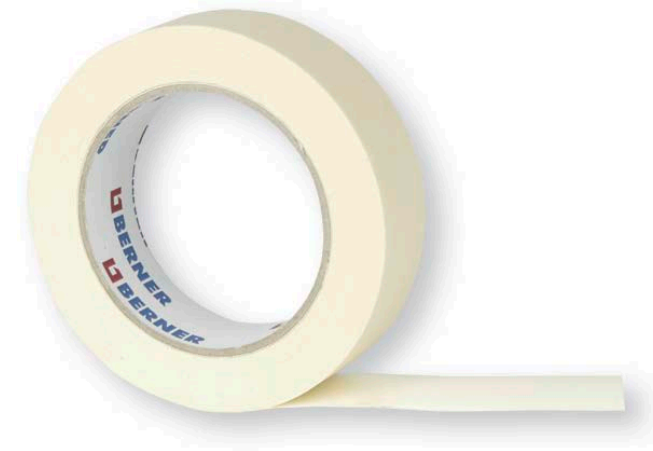


Title	Length	Width	Color	Carrier Plate Material	PU Roll	Article No.
COV STRIP STANDARD 50MX15MM	50 m	15 mm	Brown	Fine crepe	1/60	787388
Heat resistant masking Tape	50 m	19 mm	Beige	Fine crepe	1/48	299964
Heat resistant masking Tape	50 m	25 mm	Beige	Fine crepe	1/36	299966
Heat resistant masking Tape	50 m	30 mm	Beige	Fine crepe	1/8/32	251003
BER.COV HEAT RES.610W 50M 38MM	50 m	38 mm	Beige	Fine crepe	1/24	013741
Heat resistant masking Tape	50 m	50 mm	Beige	Fine crepe	1/24	299968

AGR: 11.910

## Profi Masking Tape

- Suitable for water based paints
- Tear proof
- Finely creped
- Temperature resistant from -30 °C up to +120 °C

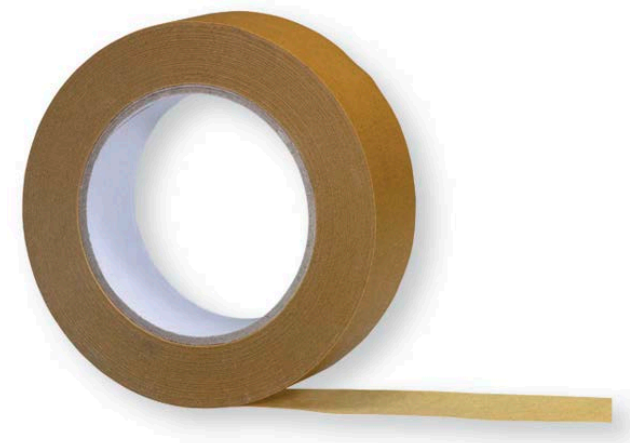

### Application Area

- Masking during painting work and fastening of painting foils and masking paper

### Technical Data


Temperature resistance -30 °C - 120 °C

Title	Length	Width	Color	Carrier Plate Material	PU Roll	Article No.
Profi Masking Tape	50 m	19 mm	Anodic brown	Fine crepe	1/48	049688
Profi Masking Tape	50 m	30 mm	Anodic brown	Fine crepe	1/8/32	134664
Profi Masking Tape	50 m	50 mm	Anodic brown	Fine crepe	1/24	049691

AGR: 11.910

## Multi Fine Line Tape

- Simple curved with high level of elasticity
- Extremely thin and tear resistant
- Heat resistance up to 135 °C

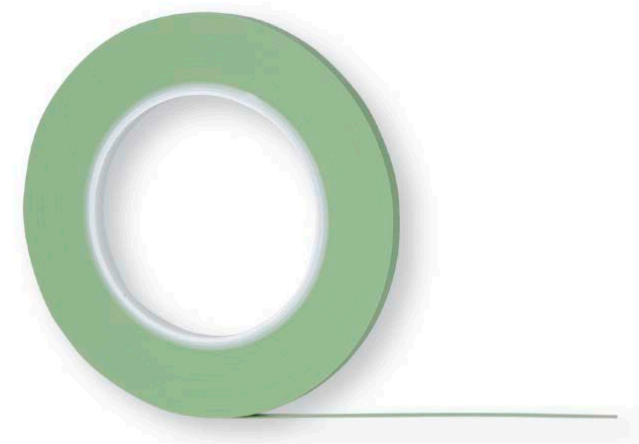

### Application Area

- Used for taping and masking during design and multiple paint work

Title	Length	Width	Color	Carrier Plate Material	PU Roll	Article No.
Multi Fine Line Tape	55 m	3 mm	Beige	PVC	1	108064
Multi Fine Line Tape	55 m	6 mm	Beige	PVC	1	108066
Multi Fine Line Tape	55 m	9 mm	Beige	PVC	1	108067

AGR: 11.400

## Crepe Masking Tape for Painting

- High initial adhesion
- Without having to remove adhesive residue
- Finely creped
- Solvent resistant

### Application Area


- Taping over of windows, doors and frames found both indoors and outdoors

### Processing Information

- Surfaces must be dry, clean and free of grease.
- Keep masking tape away from direct sunlight, heat and dust.

### Technical Data

Thickness	0.13 mm
Tensile Strength	88 N/mm <sup>2</sup>
Elongation min.	10 %
Temperature resistance	-30 °C - 60 °C

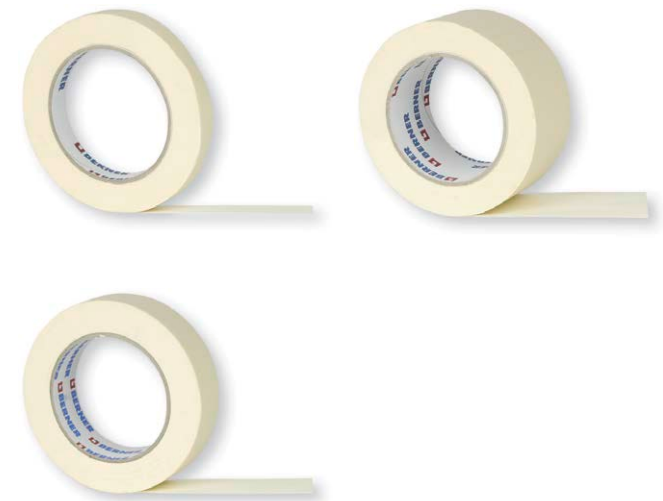

12

Title	Length	Width	Color	Carrier Plate Material	PU Amount	Article No.
Crepe masking tape for painting	50 m	15 mm	Nature	Fine crepe	1/15/60	149644
MASKING TAPE 60° 50M 19MM	50 m	19 mm	Nature	Fine crepe	1/48	006445
MASKING TAPE 60° 50M 25MM	50 m	25 mm	Nature	Fine crepe	1/36	006446
MASKING TAPE 60° 50M 30MM	50 m	30 mm	Nature	Fine crepe	1/32	100627
Crepe masking tape for painting	50 m	38 mm	Nature	Fine crepe	1/6/24	149648
MASKING TAPE 60° 50M 50MM	50 m	50 mm	Nature	Fine crepe	1/24	006444

AGR: 11.910

## Crepe tape orange

- Particularly fine color edges without trailing color
- For indoor and outdoor applications
- For smooth and rough surfaces
- Special paper tape for the highest requirements in the areas of automotive, metal and paints
- High curve stability
- Easy to separate by hand



## Adhesives tapes

### Application Area

- For the adhesive tape for painting work

### Characteristics

- Good adhesion to metal, glass, plastic, rubber, stone, concrete, concrete, plaster, plastic, plaster
- High quality crepe paper tape from Japanese washi paper
- Leaves no adhesive residue when removed up to 4 months

### Processing Information

- Surface must be clean and free of dust and grease.
- The technical data are achieved after a detention period of 24 hours at + 23 ° C.

### Hints

- The rolls must be stored on the cutting edge in the original packaging. The product is stable for up to 12 months at a storage temperature between + 10 ° C and + 30 ° C.
- We recommend to carry out gluing tests before each application
- Pallet quantity for item no. 244997 - 18mm: 1,440 pieces - Pallet quantity for item no. 244994 - 24mm: 1.080 Piece pallet quantity for item no. 244992 - 30mm: 840 piece pallet quantity for item number 244990 - 36mm: 720 Piece pallet quantity for item no. 244986 - 48mm: 480 pieces

### Technical Data

Thickness	0.09 mm
Tensile Strength	130 N/25mm
Elongation min.	3 %
Processing temperature	15 - 30 °C

Title	Length	Width	PU Piece	Article No.
MASKENBAND GOLD 18MM	50 m	18 mm	1/48	244997
MASKING TAPE GOLD 24MM	50 m	24 mm	1/36	244994
MASKING TAPE GOLD 30MM	50 m	30 mm	1/28	244992
MASKENBAND GOLD 36MM	50 m	36 mm	1/24	244990
MASKIING TAPE GOLD 48MM	50 m	48 mm	1/16	244986

AGR: 11.910

## Masking Tape Purple



12

Title	Length	Width	PU Roll	Article No.
Masking Tape Purple	50 m	24 mm	1/36	363363
Masking Tape Purple	50 m	30 mm	1/28	363355
Masking Tape Purple	50 m	36 mm	1/24	363356
Masking Tape Purple	50 m	48 mm	1/16	363357

AGR: 11.910

## Refill Rolls

- Quick and simple assembly, due to self adhesive properties
- Superb adhesive power to practically all materials such as metal, wood, stone, ceramic, painted surfaces and plastics

### Application Area

- Quick and simple fastening of parts, linings and fasteners

### Characteristics

- Temperature resistant: Adhesive -20 °C up to +85 °C, hook and loop tape -30 °C up to +150 °C, color: Black

### Processing Information

- Processing through adhesion, rivets, nails, sewing or staples

### Scope Of Delivery

- Supplied in a practical dispenser box

### Technical Data

Carrier Plate Material	Aluminum
Adhesive Tape, Type	velcro' adhesive tape
Temperature resistance	-20 °C - 85 °C
Tensile Strength	10 N/cm



Sluisterktes	Afpelsterkte		Afschuijsterkte		Hechtsterkte	
	Gemiddelde (N/cm)	Minimum (N/cm)	Gemiddelde (N/cm <sup>2</sup> )	Minimum (N/cm <sup>2</sup> )	Gemiddelde (N/cm <sup>2</sup> )	Minimum (N/cm <sup>2</sup> )
Origineel	2,3	1,3	10,0	6,0	4,5	3,0
Na 5000 x sluiten/openen	0,75	0,65	3,5	3,0	2,0	1,5



Title	Length	Width	Thickness	Color	PU Amount	Article No.
Velcro Tape Box	10 m	20 mm	-	black	1	151807
Velcro Hook Refill	10 m	20 mm	4 mm	black	1	151806
Velcro Fleece Refill	10 m	20 mm	4 mm	black	1	151808

AGR: 11.914



## Adhesive Tape Lift'n Stick 3M


- Flexible around bends
- Residue-free removal

### Application Area

- For an optimal and tational covering of windows with a rubber sealing

### Characteristics

- No sharp edges
- Temperature resistancy up to +140°C

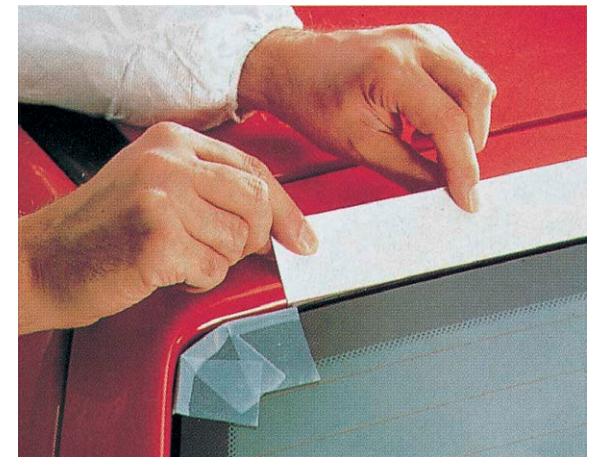

12



Title	Length	Width	Color	PU Roll	Article No.
LIFT'N STICK 10MM 50MM X 10M	10 m	50 mm	White	1	908827


AGR: 11.400

## Soft Tape 3M

- Self-adhesive foam sealing tape
- Protection against the mist of paint splatters

### Application Area

- Covering of body panels for producing soft lacquer transitions

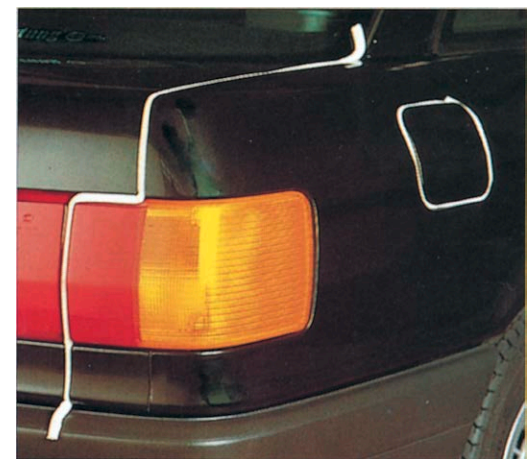

Title	Color	Length	Width	PU Box	Article No.
SOFT TAPE 09973 35 M 19 MM	White	35000 mm	19 mm	1	102478
SOFT TAPE 09973 35 M 19 MM	White	50000 mm	13 mm	1	842478

AGR: 11.400

## Dispenser For Paper Towels

- Easy maintenance and use
  - Visual inspection
- Hygienic
  - Sheet by sheet distribution system so no contact with the dispenser
- Eco-friendly
  - Paper waste is reduced

### Application Area

- Dispenser for folded paper towels

### Characteristics

- Stable, rust-free, impact-resistant plastic, hygienic,
- Color: white, Dimension: 27x25x13 cm

### Scope Of Delivery

- Packed individually in a carton
- Fixing kit with screws included

### Technical Data

Material	ABS
Color	White

Title	Height x Width x Depth	PU Piece	Article No.
Dispenser for Z-folded paper towels	280 x 260 x 145 mm	1	002239

AGR: 08.523



## Paper Dispenser M1 Mini Elevation

- Easy maintenance and use
  - ▶ Compact versatile solution for professional environments where both hand and surface wiping are required
  - ▶ The lock mechanism helps control misuse
  - ▶ One-hand operation makes it easy to use
- Hygienic
  - ▶ Reduced cross-contamination risks because users only touch what they use
- Eco-friendly
  - ▶ Reduced consumption and waste

### Application Area

- For professional use in workshops

### Characteristics

- Small towel dispenser, stable, non-rorrosive, impact-resistant plastic, lockable, hygienic

### Hints

- Matching M1 - Centrefeed system small

### Scope Of Delivery

- Packed individually in a carton

### Technical Data

Material	Plastic
Color	black



Title	Height x Width x Depth	PU Piece	Article No.
Tork mini centrefeed dispenser	321 x 174 x 165 mm	1	816128

AGR: 08.523

## Towel Dispenser H3 Elevation

### Application Area

- Dispenser for folded paper towels

### Characteristics

- Stable, rust-free, impact-resistant plastic, hygienic



Title	Height	Ø	PU Piece	Article No.
C-BOX PAPER DISPENSER	400 mm	300 mm	1	870281

AGR: 08.523

INTERNAL/Approved (2019-03-22 22:44:51)

## Tork maxi centrefeed dispenser

- Easy maintenance and use
  - Lockable plastic container
  - Makes it quicker to get the needed paper
- Hygienic
  - Protects refills from dirt and offers one-at-a-time dispensing
- Eco-friendly
  - Reduced consumption and waste

### Application Area

- For professional use in workshops

### Hints

- Matching W2 - Wipers combi roll system

### Scope Of Delivery

- Packed individually in a carton
- Lockable with a key, included

### Technical Data

Material Plastic



Title	Height x Width x Depth	PU Piece	Article No.
Internal Unwinding Tork Dispenser	447 x 328 x 302 mm	1	881454

AGR: 08.523



## Unwinding systems for industrial rolls

- Comfortable usage
  - A robust floor dispenser for industrial wiping rolls

### Application Area

- Ideal for industrial environments

### Hints

- Roll width up to 40cm

### Scope Of Delivery

- Article 162399:  
Integrated holder for 125 litre bin liners  
Stand has wheels for easy mobility
- Article 162401:  
Without wheels, without bin
- Article 162400:  
Wallholder

Title	Height x Width x Depth	PU Piece	Article No.
Wall Holder	325 x 500 x 260 mm	1	162400
Floor Stand	910 x 515 x 70 mm	1	162401

AGR: 08.501



## Paper Dispenser

- Stable construction
- Mobile
- For 3 rolls masking paper
- Includes a mount for adhesive tape
- Light Distance of approx. 120 cm, so that max. 100 cm breadth can be rolled out

### Application Area

- Scrolling system for masking paper

Title	Height x Width x Depth	PU Piece	Article No.
Mobile Paper Dispenser AGR: 11.531	990 x 1200 x 380 mm	1	116960



## Wall Mounting "Protective Foils" (unassembled)


- Stable design
- For 3 rolls of protection foils
- Practical and functional

### Application Area

- Unwinding system for protective foils

### Characteristics

- For the wall assembly. The wall mounting offers space for 3 or 4 rolls of protection foils and must be assembled individually.

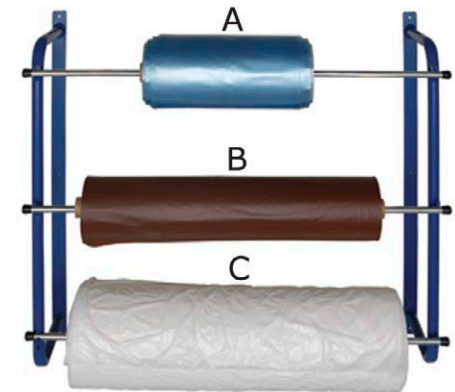

Title	Height x Width x Depth	PU Piece	Article No.
Wall Holder for Protection Foil	535 x 810 x 250 mm	1	024171

AGR: 07.031

## Big-Bag

### Application Area

- Especially suitable for the transportation of sand, rocks, debris, dust and cement
- Storage of various materials
- Transportation of plants with earth and other bulky goods

### Characteristics

- Disposable PP bag, UV-stable

Title	Length	Width	PU Piece	Article No.
DISCHARGE RUBBISH BAG	90 cm	90 cm	1	048534

AGR: 08.530



## Garbage Bag

### Characteristics

- Thickness: 50 my
- Perforated
- 25 pcs on a roll

Title	Width	PU Roll	Article No.
GARBAGE BAG 150L BLACK	600 mm	1/2/5/10	055272

AGR: 08.530



## Debris bag 500x900 mm white

### Characteristics

- Transparent
- Extreme tear resistance

### Technical Data

Material Polyvinyl Chloride (PVC)

Title	Color	Width	PU Carton	Article No.
RUBBISH BAG 500X900 100 PCS.	Transparent	500 mm	1/2/5/10	034977

AGR: 08.530



12

## Debris bag 160 l 120 µm black

### Characteristics

- Thickness: 120 µm
- Perforated
- 50 pcs on a roll

Title	Width	PU Roll	Article No.
RUBBISH BAG 160L BLACK 120MY	600 mm	1/2/5	055273

AGR: 08.530



## Reusable seat protector - Eco leather

**PREMIUM***line*

- Reusable
  - Extremely durable and tear resistant
- Very functional
  - Suitable for nearly all vehicles
  - Ideal for long term operations
- Waterproof
  - No moisture can enter the smooth surface
  - Allows wiping of dirt and oil
- Extreme performance
  - Highly protective against dust, dirt and oil



### Application Area

- Protection of the vehicle seat from dirt and oil during maintenance and repair

### Technical Data

Material PVC

Title	Length in m x Width in m	Thickness	Color	PU Piece	Article No.
Reusable Seat Cover f. Airbag	1.34 x 0.62 m	0.95 mm	Blue	1/2/5	161193

AGR: 11.501



## Disposable Door Mate

- Protects the foot area against contamination

### Scope Of Delivery

- 1 roll à 500 pcs



12



Title	Length in m x Width in m	Color	Container	Number Of blades	PU Roll	Article No.
DISPOSABLE DOOR MAT 550X610 MM	0.61 x 0.55 m	White	Roll	500 PC	1	821900

AGR: 11.521



## Accessory

### Doormat paper

- Protects floor mats in vehicle against dirt

#### Technical Data

Material	Paper
----------	-------

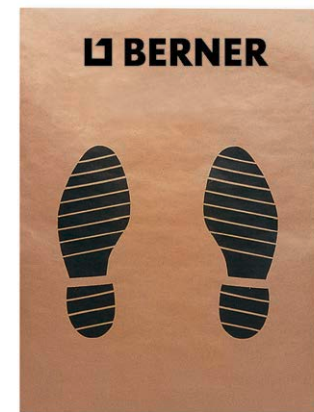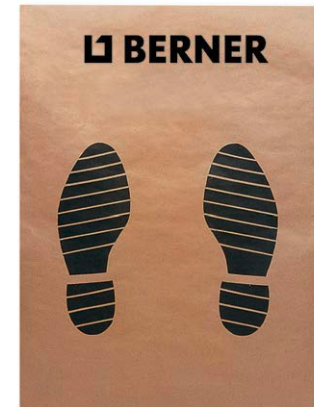

Title	Length in m x Width in m	Color	Container	Number Of blades	PU Package	Article No.
DOOR MATS PAPER 5KG-225 PCS	0.61 x 0.43 m	Brown	Pack	225 PC	1	102398

AGR: 11.521

## Tyre Bags 700/500X1190/1200

- The clean conveyor tire

### Characteristics

- Material: polyethylene white

### Technical Data

Material Polyethylene (PE)



Title	Length in m x Width in m	Color	Container	PU Roll	Article No.
Tyre Bags	0.88 x 1 m	White	Roll	1	146326
Tyre Bags	0.96 x 0.96 m	White	Roll	1/3	168869
Tyre Bags	1.2 x 0.7 m	White	Roll	1	201046

AGR: 11.512



## Single Use Cover with Handle

### Characteristics

- Ductile, non-slip adhesive foil
- Sufficient for approx. 215 steering wheels

### Technical Data

Material Polyvinyl Chloride (PVC)

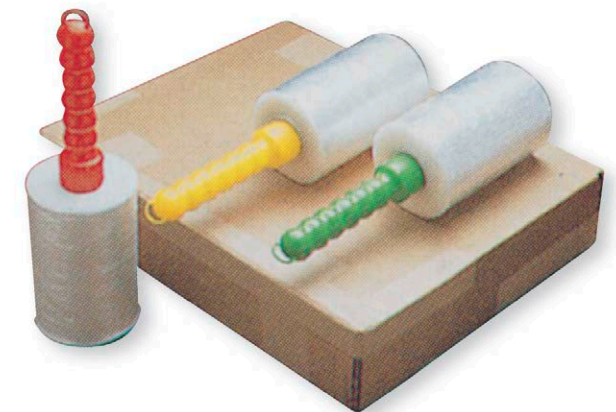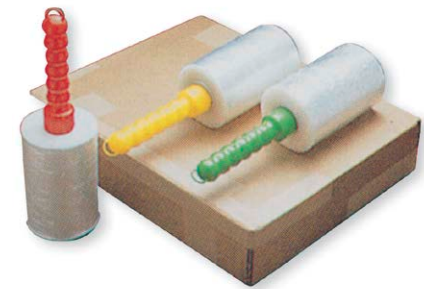

Title	Length in m x Width in m	Color	Container	PU Piece	Article No.
DISPOSABLE PROT.FILM W.HANDLE	300 x 0.14 m	Transparent	Roll	1	787353

AGR: 11.510

### Reusable seat and steering wheel protection - nylon **STANDARDline**

- Reusable
  - Extremely durable and tear resistant
  - Made of long lasting nylon
- Easy to clean
  - Washable
- Functional
  - Suitable for nearly all vehicles
  - Adapted for long term operations
- Perfect performance
  - Highly protective against oil, dust and dirt

#### Application Area

- Protection of the vehicle seat and steering wheel during maintenance and repair

#### Technical Data

Material Nylon



Title	Length in m x Width in m	Thickness	Color	PU Piece	Article No.
Reusable steering wheel cover - nylon	1.22 x 0.15 m	0.155 mm	Blue	1/2/5	200914
Reusable seat cover - nylon	1.45 x 0.735 m	0.155 mm	Blue	1/2/5	200915

AGR: 11.501

## Single Use - Protective Foil

- Stretchable and slip-resistant
- Extremely tear-resistant

### Application Area

- Protection when transporting workpieces

### Characteristics

- Material thickness:  
 Item No. 112795 = 23  $\mu$   
 Item No. 153722 = 17  $\mu$

### Processing Information

- Protective foil 125 mm is used together with handle - article 11042.  
 Protective foil in roll 0.785 m is for wrapping seats and is used without any additional tools

### Technical Data

Material	Polyethylene (PE)
----------	-------------------



12





## Single Use Protective Foil

- Stretchable, non-slip
- Extremely tear-resistant

### Application Area

- Protection of steering wheel and gear lever knob
- Transport protection for wooden and metal trim strips

### Technical Data

Material Plastic



Title	Color	PU Piece	Article No.
Dispenser for Protection Foil	Blue	1	011042

AGR: 11.510

INTERNAL/Approved (2019-03-22 22:46:35)



## Fender Cover

- Universally suitable for all vehicles
- Optimal hold on the vehicle
- No damage to the paint surface due to the foam plastic coated contact surface

### Application Area

- Used for protection of the fender during repair and maintenance work

### Characteristics

- Largely resistant to oil and acid , blue leather

### Technical Data

Material plastic adhesive

Title	Length in m x Width in m	Color	PU Piece	Article No.
Fender Cover with magnet	1.1 x 0.65 m	Blue	1	715123

AGR: 11.535



12

## Front Fender Saver

- Fits for all car types
- Fixation on car with elastic strip
- Saver is light-and air transmitting in the part of the front grill and lights

### Application Area

- Protection of the front and fender in the workshop



Title	PU Piece	Article No.
Front Fender Saver	1	209184

AGR: 11.535

INTERNAL/Approved (2019-03-22 22:46:42)

## Accessory

### Front Cover

- Universally suitable for all vehicles
- Optimal hold on the vehicle
- No damage to the paint surface due to the foam plastic coated contact surface



### Application Area

- Used for the protection of the fender during repair and maintenance works

### Characteristics

- Largely resistant to oil and acid , blue leather

Title	Height	Width	PU Piece	Article No.
Front cover with hook 120 x 65 mm	650 mm	1200 mm	1	043752

AGR: 11.535

### Film Cutter

### Application Area

- For the quick separation of the film



Title	Length	PU Piece	Article No.
FILM CUTTER "CORNUFLEX"	75 mm	1	787370

AGR: 03.300

## Car Protection Foils and Crepe Floor Mats

- Non slipping foils
- Perforated tearing edge for easy handling
- Steady consumption

### Application Area

- Protection of vehicle seats, steering wheel and carpets against dirt

### Characteristics

- Material made of environmentally friendly white PE foil

### Hints

- Delivery without wall holder
- Contents of the steering wheel protection foil item no. 24520: 500 pieces

### Scope Of Delivery

- Set consists of 1 roll (250 single seat)
- Contents of a single seat: Seat cover, steering wheel cover, doormat

### Technical Data

Material Polyethylene (PE)

Title	Color	Container	Number Of blades	PU Roll	Article No.
Protection Foil Set	White	Roll	250 PC	1	024538

AGR: 11.500

### Accessories Available

	PU Amount	Article No.
Tyre Bags 700/260x995/1000 mm, 100 pcs.	1/3	168869
Tyre Bags 700/500X1190/1200	1	201046
Tyre Bags 880x1000 mm, 100 pcs.	1	146326
Wall Holder for Protection Foil, 535 x 810 x 250	1	024171



## Set Protezione 5 in1

- Adatto a tutti i tipi di abitacolo
- Kit racchiuso in una pratica confezione antipolvere

### Application Area

- Per la protezione degli abitacoli delle vetture durante i lavori di manutenzione



### Hints

- Ogni scatola comprende 100 kit

### Scope Of Delivery

- 1 set contiene:
- Pellicola per il sedile: 13μ, 135 x 82 cm
- Tappetino antiscivolo 38 x 50 cm
- Coprivolante con elastico Ø 40 cm
- Copri freno a mano senza elastico
- Copripomello del cambio con elastico

### Technical Data

Material	Polyethylene (PE)	
Color	White	

Title	PU Set	Article No.
Zestaw folii 5x1 100 szt.	1/4/8	132311

AGR: 11.500



## Clean set for trucks **STANDARDline**

- Adaptable
  - Suitable for all truck interiors
- Practical
  - Packed in a dustproof bag
- Efficient
  - Steering wheel and shift knob covers come with an elastic band

### Application Area

- Protection of the truck interior during maintenance and repair

### Hints

- Box of 100 Sets

### Scope Of Delivery


- 1 set contains:
  - Seat protector 13μ, 140 x 84 cm
  - Floor mat 45 x 50 cm, anti slip with outcut for the truck steering column
  - Steering wheel cover Ø 55 cm, with elastic band
  - Handbrake cover without elastic band
  - Shift knob cover with elastic band

### Technical Data

Material	Polyethylene (PE)	
Color	White	

Title	PU Set	Article No.
Clean set truck	1/4/8	208906

AGR: 11.500





## Seat cover Optifit **PREMIUM**line

- Perfect fit
  - ▶ Non-slip inner surface allows a better hold on the seat
  - ▶ Slippy outer surface will not cling to the operator's clothes
- Highest performance
  - ▶ Ensures cleanliness after repairing
  - ▶ Highly protective against dirt, water and oil
- Flexible and very practical
  - ▶ Suitable for nearly all vehicles



### Application Area

- Protection of the car seat from dirt and oil during maintenance and repair



### Hints

- Precut on roll

### Technical Data

Material Polyethylene (PE)

Title	Length in m x Width in m	Thickness	Color	Container	Number Of blades	PU Roll	Article No.
Disposable Seat Cover OPTIFIT qty. 500	1.37 x 0.79 m	0.013 mm	White	Roll	500 PC	1	124530

AGR: 11.500

### Accessories Available

	PU Amount	Article No.
Wall Holder for Protection Foil, 535 x 810 x 250	1	024171



## Anti-slip car interior protection set all in1 **PREMIUM***line*

- Perfect fit of the seat cover and floormat
  - Non-slip inner surface allows a better hold on the seat
- Easy storage
  - One tear includes 5 high quality protecting elements
- Very practical and highly efficient
  - Suitable for all car interiors
  - Total interior protection for customer satisfaction
  - Less plastic waste compared to other articles supplied with an outer packaging

### Application Area

- Protects the vehicle interior from dirt

### Hints

- Roll of 200 Sets
- Seat protector: 960 x 1400 mm, floormat: 510 x 700 mm

### Scope Of Delivery

- 1 tear-off part contains 5 parts:
  - Seat protector and floormat in one - 13 μ
  - Shift knob protection 90 x 150 mm
  - Handbrake protection that fits all types, 100 x 150 mm
  - Steering wheel cover, stretchy and fits to all car steering wheels, 490 x 150 mm

### Technical Data

Material	Polyethylene (PE)	
Color	Transparent	

Title	PU Roll	Article No.
Interior protection Set 5 in 1	1	208897

AGR: 11.500

Accessories Available	PU Amount	Article No.
Wall Holder for Protection Foil, 535 x 810 x 250	1	024171



## Accessory

### Seat cover for trucks **STANDARD***line*

- Strong performance
  - ▶ Ensures cleanliness after repairing
  - ▶ Highly protective against dirt, water and oil
- Practical
  - ▶ Suitable for multiple seats
  - ▶ Approved for seats with side airbag

#### Hints

- Perforated on roll

#### Technical Data

Material Polyethylene (PE)

Title	Length in m x Width in m	Thickness	Color	Container	Number Of blades	PU Roll	Article No.
Standard seat cover truck	1.4 x 0.85 m	0.013 mm	White	Roll	250 PC	1	217852

AGR: 11.500



## Noise Protection Cladding

- Self adhesive
- Resistant to water, salt water, motor oil, fuel

### Application Area

- Reduces vibrations and noise forming in the interior of the vehicle

### Characteristics

- One side of closed flexible polyurethane foam

### Hints

- Recommended processing temperature: +20°C upward

Title	Length x width x strength	PU Piece	Article No.
Noise Protection Cladding qty. 2	1000 x 500 x 11 mm	1	121185

AGR: 11.600

## Sound Insulating Panels

- Self adhesive
- Simple processing

### Application Area


- Reduces vibrations and noise forming in the interior of the vehicle

### Characteristics

- Bitumen panels with aluminium coating

Title	Length x width x strength	PU Piece	Article No.
Sound Insulating Panels qty. 6	550 x 250 x 2 mm	1	138053

AGR: 11.600



12

